



# MOTORS

**Technical Information**

*WS Orbital Motors*



*together in motion*



# Contents

---

<b>Chapter 1 General Information</b>	<b>4</b>
<b>Operating Recommendations</b>	<b>5</b>
<i>Oil type</i>	5
<i>Fluid viscosity &amp; Filtration</i>	5
<i>Installation &amp; Start- Up</i>	5
<i>Motor protection</i>	5
<i>Hydraulic Motor Safety Precaution</i>	5
<i>Motor/Brake Precaution</i>	6
<i>Motor circuits</i>	7
<b>Product testing</b>	<b>8</b>
<b>Allowable Bearing &amp; Shaft Loading</b>	<b>9</b>
<i>Example Load Rating For Mechanically Retained Needle Roller Bearing</i>	9
<b>Vehicle Drive Calculations</b>	<b>10</b>
<b>Induced Side Load</b>	<b>12</b>
<b>Shaft Nut Information</b>	<b>12</b>
<i>Precaution</i>	12
<b>Speed Sensor</b>	<b>14</b>
<b>Features / Benefits</b>	<b>14</b>
<b>Sensor options</b>	<b>14</b>
<i>Protection Circuitry</i>	15
<i>Free Turning Rotor</i>	16
<b>Internal Drain</b>	<b>16</b>
<b>Valve cavity</b>	<b>17</b>
<i>Slinger Seal</i>	17
<b>Chapter 2 WS 350/351 Series</b>	<b>18</b>
<b>Overview</b>	<b>19</b>
<b>Series Descriptions</b>	<b>19</b>
<i>Features / Benefits</i>	19
<i>Typical Applications</i>	20
<i>Specification</i>	20
<b>Displacement Performance</b>	<b>20</b>
<b>Housings</b>	<b>26</b>
<i>2-Hole, SAE A Mount</i>	26
<b>Technical Information</b>	<b>29</b>
<i>Allowable Shaft Load / Bearing Curve</i>	29
<i>Permissible Shaft Seal Pressure</i>	29
<b>Porting</b>	<b>30</b>
<i>Side Ported – Offset</i>	30
<i>Side Ported – 180° Opposed</i>	30
<i>Side Ported – Offset Manifold</i>	30
<i>End Ported - Aligned</i>	30
<b>Shafts</b>	<b>31</b>
<b>Housings</b>	<b>32</b>
<i>4-Hole, 4.00" Pilot Mount</i>	32
<i>Shafts</i>	32
<i>Length &amp; Weight Chart</i>	33
<b>Ordering Information</b>	<b>33</b>
<b>Figures</b>	<b>34</b>
<b>Tables</b>	<b>34</b>

# Chapter 1

## General Information

---

### Topics:

- *Operating Recommendations*
- *Product testing*
- *Allowable Bearing & Shaft Loading*
- *Shaft Nut Information*
- *Speed Sensor*
- *Features / Benefits*
- *Sensor options*
- *Internal Drain*
- *Valve cavity*

# Operating Recommendations

---

## Oil type

Hydraulic oils with anti-wear, anti-foam and demulsifiers are recommended for systems incorporating these motors. Straight oils can be used but may require VI (viscosity index) improvers depending on the operating temperature range of the system. Other water based and environmentally friendly oils may be used, but service life of the motor and other components in the system may be significantly shortened. Before using any type of fluid, consult the fluid requirements for all components in the system for compatibility. Testing under actual operating conditions is the only way to determine if acceptable service life will be achieved.

## Fluid viscosity & Filtration

Fluids with a viscosity between 20 - 43 cSt [100 - 200 S.U.S.] at operating temperature is recommended. Fluid temperature should also be maintained below 85°C [180° F]. It is also suggested that the type of pump and its operating specifications be taken into account when choosing a fluid for the system. Fluids with high viscosity can cause cavitation at the inlet side of the pump. Systems that operate over a wide range of temperatures may require viscosity improvers to provide acceptable fluid performance.

We recommend maintaining an oil cleanliness level of ISO 17-14 or better.

## Installation & Start- Up

When installing a motor it is important that the mounting flange of the motor makes full contact with the mounting surface of the application. Mounting hardware of the appropriate grade and size must be used. Hubs, pulleys, sprockets and couplings must be properly aligned to avoid inducing excessive thrust or radial loads. Although the output device must fit the shaft snug, a hammer should never be used to install any type of output device onto the shaft. The port plugs should only be removed from the motor when the system connections are ready to be made. To avoid contamination, remove all matter from around the ports of the motor and the threads of the fittings. Once all system connections are made, it is recommended that the motor be run-in for 15-30 minutes at no load and half speed to remove air from the hydraulic system.

## Motor protection

Over-pressurization of a motor is one of the primary causes of motor failure. To prevent these situations, it is necessary to provide adequate relief protection for a motor based on the pressure ratings for that particular model. For systems that may experience overrunning conditions, special precautions must be taken. In an overrunning condition, the motor functions as a pump and attempts to convert kinetic energy into hydraulic energy. Unless the system is properly configured for this condition, damage to the motor or system can occur. To protect against this condition a counterbalance valve or relief cartridge must be incorporated into the circuit to reduce the risk of over pressurization. If a relief cartridge is used, it must be installed upline of the motor, if not in the motor, to relieve the pressure created by the over-running motor. To provide proper motor protection for an over-running load application, the pressure setting of the pressure relief valve must not exceed the intermittent rating of the motor.

## Hydraulic Motor Safety Precaution

A hydraulic motor must not be used to hold a suspended load. Due to the necessary internal tolerances, all hydraulic motors will experience some degree of creep when a load induced torque is applied to a motor at rest. All applications that require a load to be held must use some form of mechanical brake designed for that purpose.

## Motor/Brake Precaution

**Caution!** - The motors/brakes are intended to operate as static or parking brakes. System circuitry must be designed to bring the load to a stop before applying the brake.

**Caution!** - Because it is possible for some large displacement motors to overpower the brake, it is critical that the maximum system pressure be limited for these applications. Failure to do so could cause serious injury or death. When choosing a motor/brake for an application, consult the performance chart for the series and displacement chosen for the application to verify that the maximum operating pressure of the system will not allow the motor to produce more torque than the maximum rating of the brake. Also, it is vital that the system relief be set low enough to insure that the motor is not able to overpower the brake.

To ensure proper operation of the brake, a separate case drain back to tank must be used. Use of the internal drain option is not recommended due to the possibility of return line pressure spikes. A simple schematic of a system utilizing a motor/brake is shown on page 4. Although maximum brake release pressure may be used for an application, a 34 bar [500 psi] pressure reducing valve is recommended to promote maximum life for the brake release piston seals. However, if a pressure reducing valve is used in a system which has case drain back pressure, the pressure reducing valve should be set to 34 bar [500 psi] over the expected case pressure to ensure full brake release. To achieve proper brake release operation, it is necessary to bleed out any trapped air and fill brake release cavity and hoses before all connections are tightened. To facilitate this operation, all motor/brakes feature two release ports. One or both of these ports may be used to release the brake in the unit. Motor/brakes should be configured so that the release ports are near the top of the unit in the installed position.

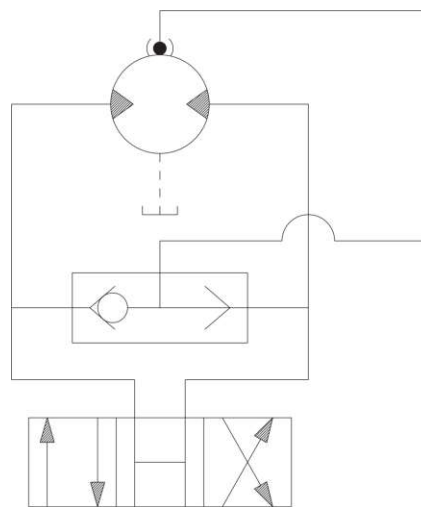


Figure 1 Typical Motor/Brake Schematic

Once all system connections are made, one release port must be opened to atmosphere and the brake release line carefully charged with fluid until all air is removed from the line and motor/brake release cavity. When this has been accomplished the port plug or secondary release line must be reinstalled. In the event of a pump or battery failure, an external pressure source may be connected to the brake release port to release the brake, allowing the machine to be moved.

**Note:**

*It is vital that all operating recommendations be followed. Failure to do so could result in injury or death.*

## Motor circuits

There are two common types of circuits used for connecting multiple numbers of motors – series connection and parallel connection.

### Series connection

When motors are connected in series, the outlet of one motor is connected to the inlet of the next motor. This allows the full pump flow to go through each motor and provide maximum speed. Pressure and torque are distributed between the motors based on the load each motor is subjected to. The maximum system pressure must be no greater than the maximum inlet pressure of the first motor. The allowable back pressure rating for a motor must also be considered. In some series circuits the motors must have an external case drain connected. A series connection is desirable when it is important for all the motors to run the same speed such as on a long line conveyor.

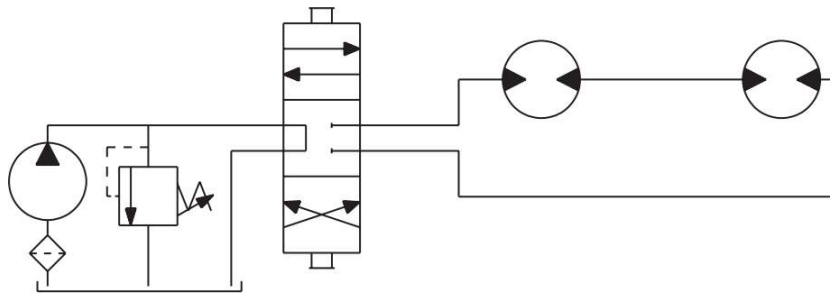


Figure 2 Series Circuit

### Parallel Connection

In a parallel connection all of the motor inlets are connected. This makes the maximum system pressure available to each motor allowing each motor to produce full torque at that pressure. The pump flow is split between the individual motors according to their loads and displacements. If one motor has no load, the oil will take the path of least resistance and all the flow will go to that one motor. The others will not turn. If this condition can occur, a flow divider is recommended to distribute the oil and act as a differential.

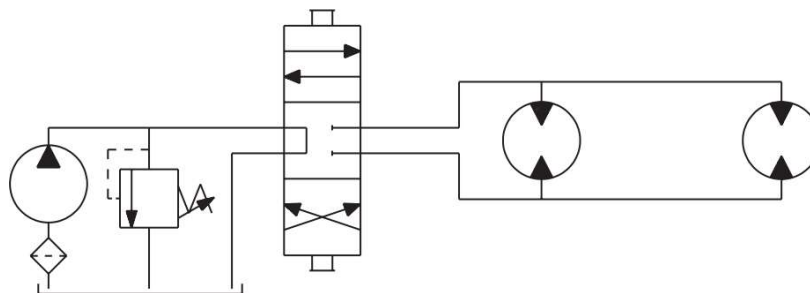



Figure 3 Parallel Circuit

**Note:**

*The motor circuits shown above are for illustration purposes only. Components and circuitry for actual applications may vary greatly and should be chosen based on the application.*

## Product testing

Performance testing is the critical measure of a motor’s ability to convert flow and pressure into speed and torque. All product testing is conducted using a state of the art test facility. This facility utilizes fully automated test equipment and custom designed software to provide accurate, reliable test data. Test routines are standardized, including test stand calibration and stabilization of fluid temperature and viscosity, to provide consistent data. The example below provides an explanation of the values pertaining to each heading on the performance chart.

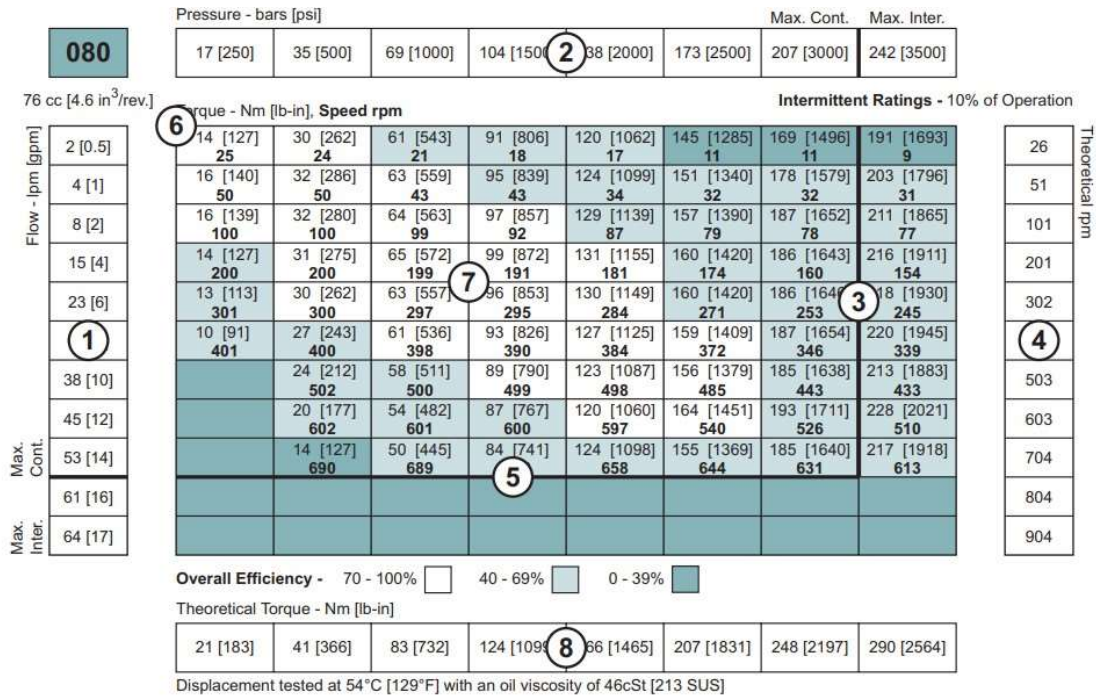

- Flow represents the amount of fluid passing through the motor during each minute of the test.
- Pressure refers to the measured pressure differential between the inlet and return ports of the motor during the test.
- The maximum continuous pressure rating and maximum intermittent pressure rating of the motor are separated by the dark lines on the chart.
- Theoretical RPM represents the RPM that the motor would produce if it were 100% volumetrically efficient. Measured RPM divided by the theoretical RPM give the actual volumetric efficiency of the motor.
- The maximum continuous flow rating and maximum intermittent flow rating of the motor are separated by the dark line on the chart.
- Performance numbers represent the actual torque and speed generated by the motor based on the corresponding input pressure and flow. The numbers on the top row indicate torque as measured in Nm [lb-in], while the bottom number represents the speed of the output shaft.
- Areas within the white shading represent maximum motor efficiencies.
- Theoretical Torque represents the torque that the motor would produce if it were 100% mechanically efficient. Actual torque divided by the theoretical torque gives the actual mechanical efficiency of the motor.

WHITE can accept no responsibility for possible errors in catalogues, brochures, and other printed material. WHITE reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary in specifications already agreed.

All trademarks in this material are the property of the respective companies. WHITE and the WHITE logotype are trademarks of WHITE Drive Motors & Steering LLC and WHITE Drive Motors and Steering Sp. z o.o..



## Allowable Bearing & Shaft Loading

This catalog provides curves showing allowable radial loads at points along the longitudinal axis of the motor. They are dimensioned from the mounting flange. Two capacity curves for the shaft and bearings are shown. A vertical line through the centerline of the load drawn to intersect the x-axis intersects the curves at the load capacity of the shaft and of the bearing.

In the example below the maximum radial load bearing rating is between the internal roller bearings illustrated with a solid line. The allowable shaft rating is shown with a dotted line.

The bearing curves for each model are based on laboratory analysis and testing results constructed at the organization. The shaft loading is based on a 3:1 safety factor and 330 Kpsi tensile strength. The allowable load is the lower of the curves at a given point. For instance, one inch in front of the mounting flange the bearing capacity is lower than the shaft capacity. In this case, the bearing is the limiting load. The motor user needs to determine which series of motor to use based on their application knowledge.

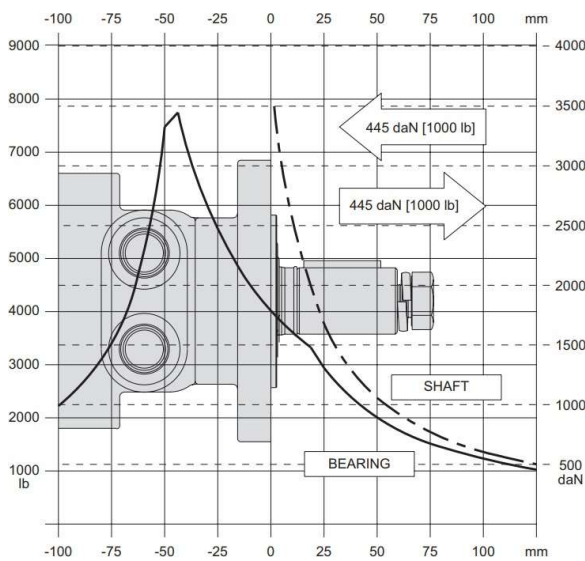


Figure 4 Allowable Bearing & Shaft Loading

### Example Load Rating For Mechanically Retained Needle Roller Bearing

Bearing Life  $L^{10} = (C/P)^p [10^6 \text{ revolutions}]$   
 $L^{10} =$  nominal rating life  
 $C =$  dynamic load rating  
 $P =$  equivalent dynamic load  
 Life Exponent  $p = 10/3$  for needle bearings

Bearing load multiplication factor table			
Rpm	Factor	Rpm	Factor
50	1.23	500	0.62
100	1.00	600	0.58
200	0.81	700	0.56
300	0.72	800	0.50
400	0.66		

Table 1 Bearing load multiplication factor table

## Vehicle Drive Calculations

When selecting a wheel drive motor for a mobile vehicle, a number of factors concerning the vehicle must be taken into consideration to determine the required maximum motor RPM, the maximum torque required and the maximum load each motor must support. The following sections contain the necessary equations to determine this criteria. An example is provided to illustrate the process.

equations to determine this criteria. An example is provided to illustrate the process

### Sample application (vehicle design criteria)

Vehicle description.....4-wheel vehicle  
 Vehicle drive.....2-wheel drive  
 GVW.....1,500 lbs.  
 Weight over each drive wheel .....425 lbs.  
 Rolling radius of tires.....16 in.  
 Desired acceleration.....0-5 mph in 10 sec.  
 Top speed.....5 mph  
 Gradeability.....20%  
 Worst working surface.....poor asphalt

### To determine maximum motor speed

$$RPM = \frac{2.65 \times KPH \times G}{r_m} \quad RPM = \frac{168 \times MPH \times G}{r_i}$$

*MPH* = max. vehicle speed (miles/hr)

*KPH* = max. vehicle speed (kilometers/hr)

*r<sub>i</sub>* = rolling radius of tire (inches)

*G* = gear reduction ratio (if none, *G* = 1)

*r<sub>m</sub>* = rolling radius of tire (meters)

**Example**  $RPM = \frac{168 \times 5 \times 1}{16} = 52.5$

### To determine maximum torque requirement of motor

To choose a motor(s) capable of producing enough torque to propel the vehicle, it is necessary to determine the Total Tractive Effort (TE) requirement for the vehicle. To determine the total tractive effort, the following equation must be used:

$$TE = RR + GR + FA + DP \text{ (lbs or N)}$$

Where:

*TE* = Total tractive effort

*RR* = Force necessary to overcome rolling resistance

*GR* = Force required to climb a grade

*FA* = Force required to accelerate

*DP* = Drawbar pull required

The components for this equation may be determined using the following steps:

### Step One: Determine Rolling Resistance

Rolling Resistance (RR) is the force necessary to propel a vehicle over a particular surface. It is recommended that the worst possible surface type to be encountered by the vehicle be factored into the equation.

$$RR = \frac{GVW}{1000} \times R \text{ (lb or N)}$$

Where:

*GVW* = gross (loaded) vehicle weight (lb or kg)

*R* = surface friction (value from Table 1)

**Example**  $RR = \frac{1500}{1000} \times 22 \text{ lbs} = 33$

Rolling Resistance	
Concrete (excellent) .....	10
Concrete (good) .....	15
Concrete (poor) .....	20
Asphalt (good) .....	12
Asphalt (fair) .....	17
Asphalt (poor) .....	22
Macadam (good) .....	15
Macadam (fair) .....	22
Macadam (poor) .....	37
Cobbles (ordinary) .....	55
Cobbles (poor) .....	37
Snow (2 inch) .....	25
Snow (4 inch) .....	37
Dirt (smooth) .....	25
Dirt (sandy) .....	37
Mud .....	37 to 150
Sand (soft) .....	60 to 150
Sand (dune) .....	160 to 300

*Table 1 Rolling Resistance*

### Step Two: Determine Grade Resistance

Grade Resistance (GR) is the amount of force necessary to move a vehicle up a hill or "grade." This calculation must be made using the maximum grade the vehicle will be expected to climb in normal operation.

To convert incline degrees to % Grade:

$$\% \text{ Grade} = [\tan \text{ of angle (degrees)}] \times 100$$

$$GR = \frac{\% \text{ Grade}}{100} \times GVW \text{ (lb or N)}$$

**Example**  $GR = \frac{20}{100} \times 1500 \text{ lbs} = 300 \text{ lbs}$

WHITE can accept no responsibility for possible errors in catalogues, brochures, and other printed material. WHITE reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary in specifications already agreed.

All trademarks in this material are the property of the respective companies. WHITE and the WHITE logotype are trademarks of WHITE Drive Motors & Steering LLC and WHITE Drive Motors and Steering Sp. z o.o.

### Step Three: Determine Acceleration Force

Acceleration Force (FA) is the force necessary to accelerate from a stop to maximum speed in a desired time.

$$FA = \frac{MPH \times GVW (lb)}{22 \times t} \quad FA = \frac{KPH \times GVW (N)}{35.32 \times t}$$

Where:

$t$  = time to maximum speed (seconds)

### Step Four: Determine Drawbar Pull

Drawbar Pull (DP) is the additional force, if any, the vehicle will be required to generate if it is to be used to tow other equipment. If additional towing capacity is required for the equipment, repeat steps one through three for the towable equipment and sum the totals to determine DP.

### Step Five: Determine Total Tractive Effort

The Tractive Effort (TE) is the sum of the forces calculated in steps one through three above. On low-speed vehicles, wind resistance can typically be neglected. However, friction in drive components may warrant the addition of 10% to the total tractive effort to insure acceptable vehicle performance.

$$TE = RR + GR + FA + DP \text{ (lb or N)}$$

**Example**  $TE = 33 + 300 + 34 + 0 \text{ (lbs)} = 367 \text{ lbs}$

### Step Six: Determine Motor Torque

The Motor Torque (T) required per motor is the Total Tractive Effort divided by the number of motors used on the machine. Gear reduction is also factored into account in this equation.

$$T = \frac{TE \times ri}{M \times G} \text{ lb-in per motor}$$

$$T = \frac{TE \times rm}{M \times G} \text{ Nm per motor}$$

Where:

$M$  = number of driving motors

**Example**  $T = \frac{367 \times 16}{2 \times 1} \text{ lb-in/motor} = 2936 \text{ lb-in}$

### Step Seven: Determine Wheel Slip

To verify that the vehicle will perform as designed in regard to tractive effort and acceleration, it is necessary to calculate wheel slip (TS) for the vehicle. In special cases, wheel slip may actually be desirable to prevent hydraulic system overheating and component breakage should the vehicle become stalled.

**Example**  $FA = \frac{5 \times 1500 \text{ lbs}}{22 \times 10} = 34$

$$TS = \frac{W \times f \times ri}{G} \text{ (lb-in per motor)}$$

$$TS = \frac{W \times f \times rm}{G} \text{ (N-m per motor)}$$

Where:

$f$  = coefficient of friction (see table 2)

$W$  = loaded vehicle weight over driven wheel (lb or N)

**Example**  $TS = \frac{425 \times .06 \times 16}{1} \text{ lb-in/motor} = 4080 \text{ lbs}$

#### Coefficient of friction (f)

Steel on steel.....	0.3
Rubber tire on dirt.....	0.5
Rubber tire on a hard surface .....	0.6 - 0.8
Rubber tire on cement.....	0.7

Table 2 Coefficient of friction

### To determine radial load capacity requirement of motor

When a motor used to drive a vehicle has the wheel or hub attached directly to the motor shaft, it is critical that the radial load capabilities of the motor are sufficient to support the vehicle. After calculating the Total Radial Load (RL) acting on the motors, the result must be compared to the bearing/shaft load charts for the chosen motor to determine if the motor will provide acceptable load capacity and life.

$$RL = \sqrt{W^2 + \left(\frac{T}{ri}\right)^2} \text{ lb} \quad RL = \sqrt{W^2 + \left(\frac{T}{rm}\right)^2} \text{ kg}$$

**Example**  $RL = \sqrt{425^2 + \left(\frac{2936}{16}\right)^2} \text{ lbs}$

Once the maximum motor RPM, maximum torque requirement, and the maximum load each motor must support have been determined, these figures may then be compared to the motor performance charts and to the bearing load curves to choose a series and displacement to fulfill the motor requirements for the application.

# Induced Side Load

In many cases, pulleys or sprockets may be used to transmit the torque produced by the motor. Use of these components will create a torque induced side load on the motor shaft and bearings. It is important that this load be taken into consideration when choosing a motor with sufficient bearing and shaft capacity for the application.


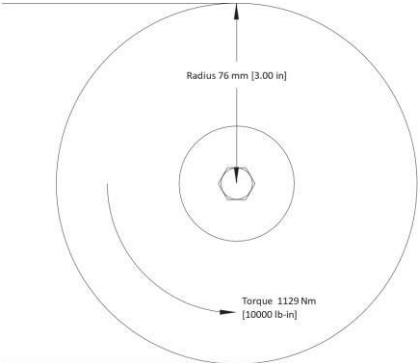


Figure 5 Induced side load


To determine the side load, the motor torque and pulley or sprocket radius must be known. Side load may be calculated using the formula below. The distance from the pulley/sprocket centerline to the mounting flange of the motor must also be determined. These two figures may then be compared to the bearing and shaft load curve of the desired motor to determine if the side load falls within acceptable load ranges.

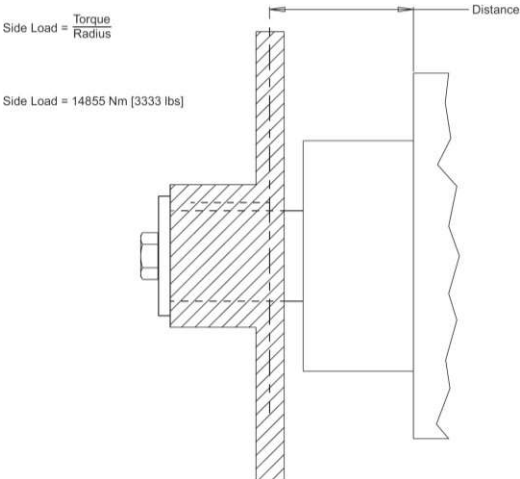

# Shaft Nut Information

## Precaution


The tightening torques listed with each nut should only be used as a guideline. Hubs may require higher or lower tightening torque depending on the material. Consult the hub manufacturer to obtain recommended tightening torque. To maximize torque transfer from the shaft to the hub, and to minimize the potential for shaft breakage, a hub with sufficient thickness must fully engage the taper length of the shaft.



### 35MM Tapered Shafts

M24 x 1.5 Thread

#### A Slotted Nut

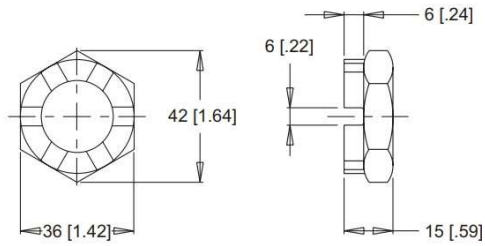


Torque Specifications: 32.5 daNm [240 ft.lb.]

### 1" Tapered Shafts


3/4-28 Thread

#### A Slotted Nut

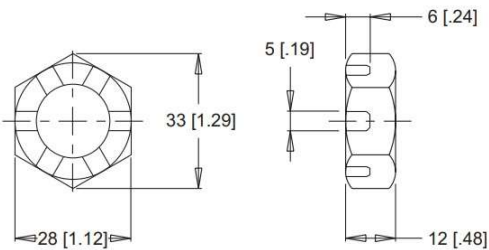


Torque Specifications: 20 - 23 daNm [150 - 170 ft.lb.]

#### B Lock Nut

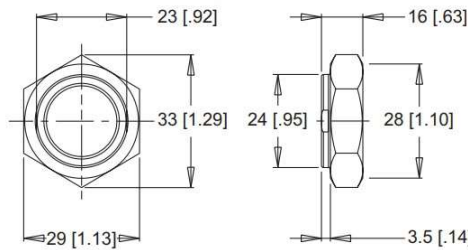

Torque Specifications: 24 - 27 daNm [180 - 200 ft.lb.]

#### C Solid Nut

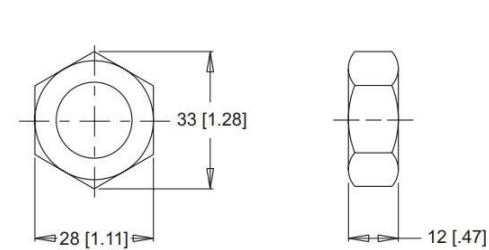


Torque Specifications: 20 - 23 daNm [150 - 170 ft.lb.]

### 1-1/4" Tapered Shafts


1-20 Thread

#### A Slotted Nut

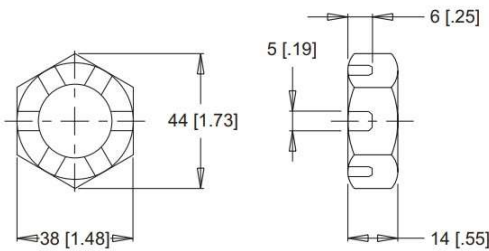


Torque Specifications: 38 daNm [280 ft.lb.] Max.

#### B Lock Nut

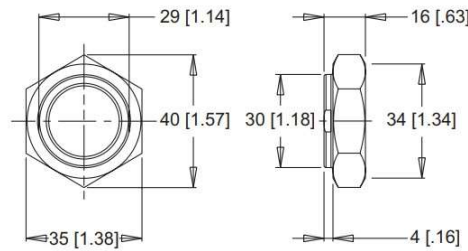

Torque Specifications: 33 - 42 daNm [240 - 310 ft.lb.]

#### C Solid Nut

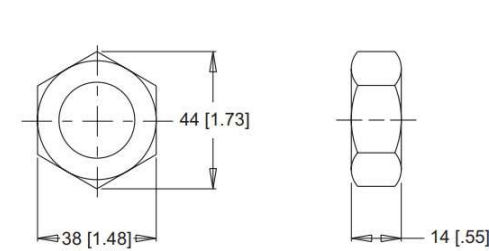


Torque Specifications: 38 daNm [280 ft.lb.] Max.

### 1-3/8" & 1-1/2" Tapered Shafts


1 1/8-18 Thread

#### A Slotted Nut

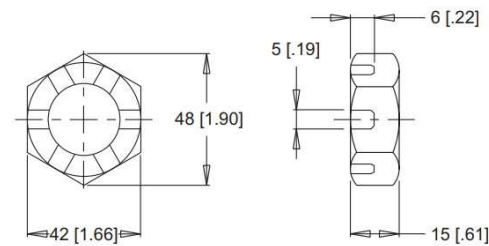


Torque Specifications: 41 - 54 daNm [300 - 400 ft.lb.]

#### B Lock Nut

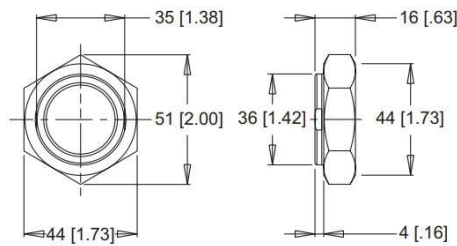

Torque Specifications: 34 - 48 daNm [250 - 350 ft.lb.]

#### C Solid Nut

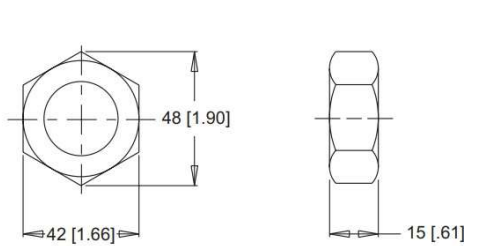

Torque Specifications: 41 - 54 daNm [300 - 400 ft.lb.]

WHITE can accept no responsibility for possible errors in catalogues, brochures, and other printed material. WHITE reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary in specifications already agreed.

All trademarks in this material are the property of the respective companies. WHITE and the WHITE logotype are trademarks of WHITE Drive Motors & Steering LLC and WHITE Drive Motors and Steering Sp. z o.o.

All rights reserved.

## Speed Sensor

We offer both single and dual element speed sensor options providing a number of benefits to users by incorporating the latest advancements in sensing technology and materials. The 700 & 800 series motors single element sensors provide 60 pulses per revolution with the dual element providing 120 pulses per revolution, with all other series providing 50 & 100 pulses respectively. Higher resolution is especially beneficial for slow speed applications, where more information is needed for smooth and accurate control. The dual sensor option also provides a direction signal allowing end-users to monitor the direction of shaft rotation .

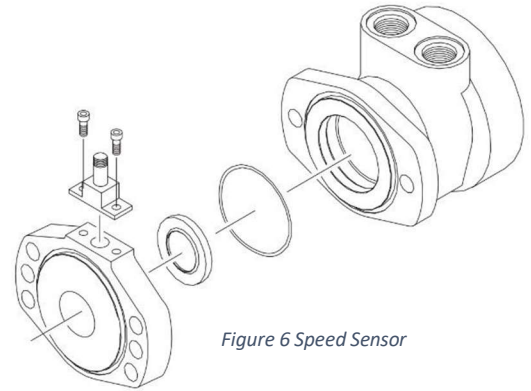


Figure 6 Speed Sensor

Unlike competitive designs that breach the high pressure area of the motor to add the sensor, the speed sensor option utilizes an add-on flange to locate all sensor components outside the high pressure operating environment. This eliminates the potential leak point common to competitive designs. Many improvements were made to the sensor flange including changing the material from cast iron to acetal resin, incorporating a Buna-N shaft seal internal to the flange, and providing a grease zerk, which allows the user to fill the sensor cavity with grease. These improvements enable the flange to withstand the rigors of harsh environments.

Another important feature of the new sensor flange is that it is self-centering, which allows it to remain concentric to the magnet rotor. This produces a consistent mounting location for the new sensor module, eliminating the need to adjust the air gap between the sensor and magnet rotor. The o- ring sealed sensor module attaches to the sensor flange with two small screws, allowing the sensor to be serviced or upgraded in the field in under one minute. This feature is especially valuable for mobile applications where machine downtime is costly. The sensor may also be serviced without exposing the hydraulic circuit to the atmosphere. Another advantage of the self-centering flange is that it allows users to rotate the sensor to a location best suited to their application. This feature is not available on competitive designs, which fix the sensor in one location in relationship to the motor mounting flange.

## Features / Benefits

- Grease fitting allows sensor cavity to be filled with grease for additional protection.
- Internal extruder seal protects against environmental elements.
- M12 or weatherpack connectors provide installation flexibility.
- Dual element sensor provides up to 120 pulses per revolution and directional sensing.
- Modular sensor allows quick and easy servicing.
- Acetal resin flange is resistant to moisture, chemicals, oils, solvents and greases.
- Self-centering design eliminates need to set magnet- to-sensor air gap.
- Protection circuitry

## Sensor options

### Z - 4-pin M12 male connector

This option has 50 pulses per revolution on all series except the DT which has 60 pulses per revolution. This option will not detect direction.

### Y - 3-pin male weatherpack connector\*

This option has 50 pulses per revolution on all series except the DT which has 60 pulses per revolution. This option will not detect direction.

**X - 4-pin M12 male connector**

This option has 100 pulses per revolution on all series except the DT which has 120 pulses per revolution. This option will detect direction.

**W - 4-pin male weatherpack connector\***

This option has 100 pulses per revolution on all series except the DT which has 120 pulses per revolution. This option will detect direction.

\*These options include a 610mm [2 ft] cable.

**SINGLE ELEMENT SENSOR - Y & Z**

Supply voltages .....	7.5-24 Vdc
Maximum output off voltage .....	V
Maximum continuous output current.....	< 25 ma
Signal levels (low, high).....	0.8 to supply voltage
Operating Temp.....	-30°C to 83°C [-22°F to 181°F]

**DUAL ELEMENT SENSOR - X & W**

Supply voltages.....	7.5-18 Vdc
Maximum output off voltage .....	V
Maximum continuous output current.....	< 20 ma
Signal levels (low, high).....	0.8 to supply voltage
Operating Temp.....	-30°C to 83°C [-22°F to 181°F]

**Sensor connectors**


**Z Option**



1	positive	brown or red
2	n/a	white
3	negative	blue
4	pulse out	black

Figure 7 Z Option


**Y Option**



A	positive	brown or red
B	negative	blue
C	pulse out	black
D	n/a	white

Figure 8 Y Option


**X Option**



1	positive	brown or red
2	direction out	white
3	negative	blue
4	pulse out	black

Figure 9 X Option

**W Option**



A	positive	brown or red
B	negative	blue
C	pulse out	black
D	direction out	white

Figure 10 W Option

**Protection Circuitry**

The single element sensor has been improved and incorporates protection circuitry to avoid electrical damage caused by:

- reverse battery protection
- overvoltage due to power supply spikes and surges (60 Vdc max.)
- power applied to the output lead

The protection circuit feature will help “save” the sensor from damage mentioned above caused by:

- faulty installation wiring or system repair
- wiring harness shorts/opens due to equipment failure or harness damage resulting from accidental conditions (i.e. severed or grounded wire, ice, etc.)
- power supply spikes and surges caused by other electrical/electronic components that may be intermittent or damaged and “loading down” the system.

While no protection circuit can guarantee against any and all fault conditions. The single element sensor from us with protection circuitry is designed to handle potential hazards commonly seen in real world applications.

Unprotected versions are also available for operation at lower voltages down to 4.5V.

WHITE can accept no responsibility for possible errors in catalogues, brochures, and other printed material. WHITE reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary in specifications already agreed.

All trademarks in this material are the property of the respective companies. WHITE and the WHITE logotype are trademarks of WHITE Drive Motors & Steering LLC and WHITE Drive Motors and Steering Sp. z o.o..

## Free Turning Rotor

The ‘AC’ option or “Free turning” option refers to a specially prepared rotor assembly. This rotor assembly has increased clearance between the rotor tips and rollers allowing it to turn more freely than a standard rotor assembly. For spool valve motors, additional clearance is also provided between the shaft and housing bore. The ‘AC’ option is available for all motor series and displacements.

There are several applications and duty cycle conditions where ‘AC’ option performance characteristics can be beneficial. In continuous duty applications that require high flow/high rpm operation, the benefits are twofold. The additional clearance helps to minimize internal pressure drop at high flows. This clearance also provides a thicker oil film at metal to metal contact areas and can help extend the life of the motor in high rpm or even over speed conditions. The ‘AC’ option should be considered for applications that require continuous operation above 57 LPM [15 GPM] and/ or 300 rpm. Applications that are subject to pressure spikes due to frequent reversals or shock loads can also benefit by specifying the ‘AC’ option. The additional clearance serves to act as a buffer against spikes, allowing them to be bypassed through the motor rather than being absorbed and transmitted through the drive link to the output shaft. The trade-off for achieving these benefits is a slight loss of volumetric efficiency at high pressures.


## Internal Drain

The internal drain is an option available on all HB, DR, and DT Series motors, and is standard on all WP, WR, WS, and D9 series motors. Typically, a separate drain line must be installed to direct case leakage of the motor back to the reservoir when using a HB, DR, or DT Series motor. However, the internal drain option eliminates the need for a separate drain line through the installation of two check valves in the motor endcover. This simplifies plumbing requirements for the motor.

The two check valves connect the case area of the motor to each port of the endcover. During normal motor operation, pressure in the input and return lines of the motor close the check valves. However, when the pressure in the case of the motor is greater than that of the return line, the check valve between the case and low pressure line opens, allowing the case leakage to flow into the return line. Since the operation of the check valves is dependent upon a pressure differential, the internal drain option operates in either direction of motor rotation.

Although this option can simplify many motor installations, precautions must be taken to insure that return line pressure remains below allowable levels (see table below) to insure proper motor operation and life. If return line pressure is higher than allowable, or experiences pressure spikes, this pressure may feed back into the motor, possibly causing catastrophic seal failure. Installing motors with internal drains in series is not recommended unless overall pressure drop over all motors is below the maximum allowable backpressure as listed in the chart below. If in doubt, contact your authorized representative.

Maximum Allowable Back Pressure		
Series	Cont. bar [psi]	Inter. bar [psi]
HB	69 [1000]	103 [1500]
DR	69 [1000]	103 [1500]
DT	21 [300]	34 [500]
D9	21 [300]	21 [300]
Brakes	34 [500]	34 [500]





## Valve cavity

The valve cavity option provides a cost effective way to incorporate a variety of cartridge valves integral to the motor. The valve cavity is a standard 10 series (12 series on the 800 series motor) 2-way cavity that accepts numerous cartridge valves, including overrunning check valves, relief cartridges, flow control valves, pilot operated check fuses, and high pressure shuttle valves. Installation of a relief cartridge into the cavity provides an extra margin of safety for applications encountering frequent pressure spikes. Relief cartridges from 69 to 207 bar [1000 to 3000 psi] may also be factory installed.

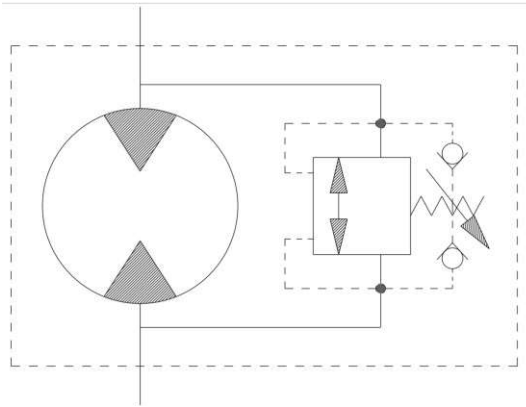


Figure 11 Valve Cavity

## Slinger Seal

Slinger seals are available on select series offered by us. Slinger seals offer extended shaft/shaft seal protection by preventing a buildup of material around the circumference of the shaft which can lead to premature shaft seal failures. The slinger seals are designed to be larger in diameter than competitive products, providing greater surface speed and 'slinging action'.

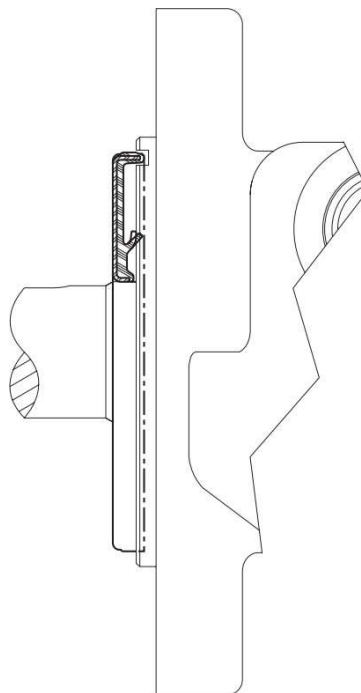


Figure 12 Slinger seal

*Slinger seals are also available on 4-hole flange mounts on select series. Contact a Customer Service Representative for additional information*

# Chapter 2

## WS 350/351 Series

---

### Topics:


- *Overview*
- *Series Descriptions*
- *Displacement Performance*
- *Housings*
- *Technical Information*
- *Porting*
- *Shafts*
- *Housings*
- *Ordering Information*

## Overview


The WS targets agricultural equipment, skid steer attachments, and other applications that require greater torque under demanding conditions. A distinguishing feature of the WS in relation to competitive products is its heavy duty drive link with a larger pitch diameter. This enables the WS to better withstand pressure and torque spikes and is reflected in its intermittent and peak performance ratings. Additional product features include a three zone commutator valve, heavy-duty tapered roller bearings, and case drain with integral internal drain.

## Series Descriptions

**350/351 – Hydraulic Motor**  
Compact

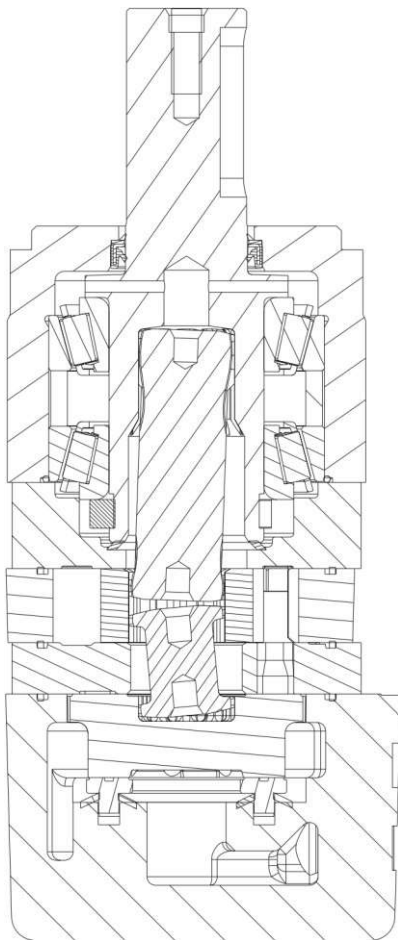

**350-351 - Hydraulic Motor**  
Short Motor

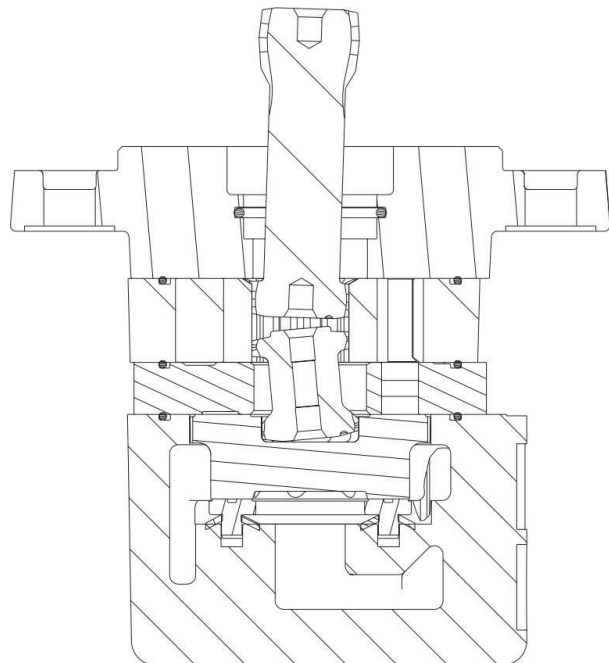

### Features / Benefits

- Ten shaft and six mounting options to meet the most common SAE and European requirements.
- Heavy-duty tapered roller bearings for extra side load capacity.
- Heavy-duty drive link with larger pitch diameter than competitors for greater resistance to pressure and torque spikes.
- Three zone commutator valve for high flow capacity.
- Standard case drain with integral internal drain for extended shaft seal life.

## Typical Applications

- Conveyors,
- Carwashes,
- Positioners,
- Light-duty wheel drives,
- Sweepers,
- Machine tool indexers,
- Grain augers,
- Spreaders,
- Feed rollers,
- Screw drives,
- Brush drives
- More.

## Specification

CODE	Displacement cm <sup>3</sup> [in <sup>3</sup> /rev]	Max. Speed rpm		Max. Flow lpm [gpm]		Max. Torque Nm [lb-in]		Max. Pressure bar [psi]		
		cont.	inter.	cont.	inter.	cont.	inter.	cont.	inter.	peak
080	79	843	929	68	76	230	305	207	276	310
	4.8			[18]	[20]	[2036]	[2699]	[3000]	[4000]	[4500]
100	100	756	945	76	95	270	362	207	276	310
	6.1			[20]	[25]	[2390]	[3204]	[3000]	[4000]	[4500]
110	112	669	837	76	95	312	418	207	276	310
	6.8			[20]	[25]	[2761]	[3699]	[3000]	[4000]	[4500]
130	129	588	734	76	95	370	499	207	276	310
	7.9			[20]	[25]	[3328]	[4416]	[3000]	[4000]	[4500]
160	161	471	707	76	114	472	627	207	276	310
	9.8			[20]	[30]	[4177]	[5549]	[3000]	[4000]	[4500]
200	201	377	566	76	114	579	765	207	276	310
	12.3			[20]	[30]	[5214]	[6770]	[3000]	[4000]	[4500]
230	229	330	495	76	114	655	872	207	276	310
	14.0			[20]	[30]	[5779]	[7717]	[3000]	[4000]	[4500]
250	248	305	459	76	114	657	769	190	224	259
	15.1			[20]	[30]	[5814]	[6806]	[2750]	[3250]	[3750]
320	322	235	352	76	114	861	1003	190	224	259
	19.6			[20]	[30]	[7620]	[8877]	[2750]	[3250]	[3750]
400	396	191	285	76	114	858	1048	155	190	224
	24.2			[20]	[30]	[7593]	[9275]	[2250]	[2750]	[3250]
500	495	153	229	76	114	851	1064	121	155	172
	30.2			[20]	[30]	[7531]	[9416]	[1750]	[2250]	[2500]

Table 4 WS 350/351 Series specification

Performance data is typical. Performance of production units varies slightly from one motor to another. Running at intermittent ratings should not exceed 10% of every minute of operation.

## Displacement Performance

Performance data is typical. Performance of production units varies slightly from one motor to another. Operating at maximum continuous pressure and maximum continuous flow simultaneously is not recommended. For additional information on product testing please refer to [Product testing](#).

**080**

Pressure - bar [psi]						Max. Cont.		Max. Inter.
17 [250]	35 [500]	69 [1000]	104 [1500]	138 [2000]	172 [2500]	207 [3000]	242 [3500]	276 [4000]

 79 cm<sup>3</sup> [4.8 in<sup>3</sup>] / rev

**Intermittent Ratings are below and to the right of the BOLD line.** Intermittent Ratings - 10% of Operation

Flow - lpm [gpm]	Intermittent Ratings									Theoretical rpm
	18 [159]	38 [336]	74 [655]							
2 [0.5]	<b>23</b>	<b>22</b>	<b>19</b>							25
4 [1]	<b>50</b>	<b>47</b>	<b>42</b>	115 [1018]	150 [1328]	182 [1611]				51
8 [2]	<b>100</b>	<b>96</b>	<b>91</b>	117 [1036]	154 [1363]	192 [1699]	224 [1983]			101
15 [4]	<b>187</b>	<b>182</b>	<b>179</b>	118 [1044]	156 [1381]	194 [1717]	230 [2036]	260 [2301]		190
23 [6]	<b>290</b>	<b>282</b>	<b>272</b>	116 [1027]	155 [1372]	192 [1699]	223 [1974]	264 [2337]	302 [2673]	291
30 [8]	<b>379</b>	<b>369</b>	<b>348</b>	117 [1036]	155 [1372]	194 [1717]	224 [1983]	266 [2354]	304 [2691]	380
38 [10]	<b>480</b>	<b>468</b>	<b>457</b>	114 [1009]	153 [1354]	191 [1690]	230 [2036]	265 [2345]	305 [2699]	481
45 [12]	<b>565</b>	<b>556</b>	<b>544</b>	113 [1000]	152 [1345]	190 [1682]	223 [1974]	265 [2345]	304 [2691]	570
53 [14]		<b>655</b>	<b>642</b>	115 [1018]	148 [1310]	189 [1673]	223 [1974]	264 [2337]	305 [2699]	671
61 [16]		<b>752</b>	<b>747</b>	103 [912]	146 [1292]	182 [1611]	225 [1991]	262 [2319]	303 [2682]	772
68 [18]		<b>843</b>	<b>830</b>	106 [938]	147 [1301]	186 [1646]	218 [1929]	260 [2301]	303 [2682]	861
76 [20]			<b>929</b>	101 [894]	140 [1239]	174 [1540]	214 [1894]	258 [2283]	302 [2673]	962

**Rotor Width**

15.7 [617]

mm [in]

 Torque - Nm [lb-in], Speed rpm Overall Efficiency - 70 - 100%  40 - 69%  0 - 39% 

22 [192]	45 [394]	88 [778]	132 [1172]	176 [1556]	219 [1939]	264 [2334]	308 [2728]	351 [3111]
----------	----------	----------	------------	------------	------------	------------	------------	------------

Theoretical Torque - Nm [lb-in] Displacement tested at 54°C [129°F] with an oil viscosity of 46cSt [213 SUS]

Pressure - bar [psi]						Max. Cont.		Max. Inter.
17 [250]	35 [500]	69 [1000]	104 [1500]	138 [2000]	172 [2500]	207 [3000]	242 [3500]	276 [4000]

 100 cm<sup>3</sup> [6.1 in<sup>3</sup>] / rev

**Intermittent Ratings are below and to the right of the BOLD line.** Intermittent Ratings - 10% of Operation

Flow - lpm [gpm]	Intermittent Ratings									Theoretical rpm
	14 [124]	38 [336]	77 [681]							
2 [0.5]	<b>19</b>	<b>19</b>	<b>17</b>							20
4 [1]	<b>39</b>	<b>39</b>	<b>37</b>	130 [1151]	169 [1496]	205 [1814]				40
8 [2]	<b>79</b>	<b>78</b>	<b>76</b>	135 [1195]	179 [1584]	220 [1947]	259 [2292]	290 [2567]		80
15 [4]	<b>148</b>	<b>148</b>	<b>145</b>	136 [1204]	181 [1602]	224 [1982]	267 [2363]	308 [2726]	341 [3018]	150
23 [6]	<b>228</b>	<b>228</b>	<b>224</b>	137 [1212]	182 [1611]	226 [2000]	270 [2390]	314 [2779]	354 [3133]	230
30 [8]	<b>299</b>	<b>298</b>	<b>294</b>	136 [1204]	181 [1602]	225 [1991]	270 [2390]	314 [2779]	356 [3151]	300
38 [10]	<b>372</b>	<b>372</b>	<b>369</b>	132 [1168]	178 [1575]	223 [1974]	269 [2381]	315 [2788]	360 [3186]	380
45 [12]		<b>444</b>	<b>435</b>	132 [1168]	178 [1575]	223 [1974]	270 [2390]	317 [2805]	362 [3204]	450
53 [14]		<b>525</b>	<b>520</b>	129 [1142]	176 [1558]	221 [1956]	269 [2381]	317 [2805]	363 [3213]	530
61 [16]		<b>604</b>	<b>600</b>	126 [1115]	172 [1522]	218 [1929]	266 [2354]	314 [2779]	361 [3195]	610
68 [18]		<b>675</b>	<b>674</b>	123 [1089]	169 [1496]	216 [1912]	263 [2328]	313 [2770]	360 [3186]	680
76 [20]		<b>756</b>	<b>754</b>	120 [1062]	167 [1478]	214 [1894]	262 [2319]	310 [2744]	359 [3177]	760
83 [22]			<b>825</b>	117 [1035]	164 [1451]	211 [1967]	259 [2292]	308 [2726]	356 [3151]	830
91 [24]			<b>905</b>	114 [1009]	161 [1425]	208 [1841]	256 [2266]	305 [2699]	352 [3115]	910
95 [25]			<b>945</b>	111 [982]	159 [1407]	206 [1823]	254 [2248]	304 [2690]	351 [3106]	950

**Rotor Width**

19.7 [776]

 Torque - Nm [lb-in], Speed rpm Overall Efficiency - 70 - 100%  40 - 69%  0 - 39% 

27 [239]	56 [493]	110 [972]	166 [1465]	220 [1944]	274 [2423]	329 [2916]	385 [3409]	439 [3888]
----------	----------	-----------	------------	------------	------------	------------	------------	------------

		Pressure - bar [psi]					Max. Cont.		Max. Inter.		
<b>110</b>		17 [250]	35 [500]	69 [1000]	104 [1500]	138 [2000]	172 [2500]	207 [3000]	242 [3500]	276 [4000]	
112 cm <sup>3</sup> [6.8 in <sup>3</sup> ] / rev		Intermittent Ratings are below and to the right of the BOLD line.					Intermittent Ratings - 10% of Operation				
Flow - lpm [gpm]	2 [0.5]	22 [195]	49 [434]	98 [867]							18
	4 [1]	23 [204]	51 [451]	102 [903]	149 [1319]	197 [1743]					36
	8 [2]	23 [204]	51 [451]	105 [929]	156 [1381]	204 [1805]	242 [2142]	281 [2487]	302 [2673]		71
	15 [4]	22 [195]	50 [443]	103 [912]	156 [1381]	207 [1832]	256 [2266]	304 [2690]	345 [3053]	371 [3283]	134
	23 [6]	22 [195]	48 [425]	101 [894]	156 [1381]	209 [1850]	261 [2310]	312 [2761]	361 [3195]	405 [3584]	205
	30 [8]	20 [177]	45 [398]	100 [885]	155 [1372]	208 [1841]	260 [2301]	312 [2761]	363 [3213]	412 [3646]	268
	38 [10]	19 [168]	42 [372]	95 [841]	153 [1354]	205 [1814]	258 [2283]	312 [2761]	363 [3213]	415 [3673]	339
	45 [12]	17 [150]	42 [372]	94 [832]	151 [1336]	204 [1805]	257 [2274]	312 [2761]	366 [3239]	418 [3699]	402
	53 [14]		38 [336]	93 [823]	148 [1310]	201 [1779]	254 [2248]	309 [2735]	364 [3221]	418 [3699]	473
	61 [16]		36 [319]	90 [797]	142 [1257]	198 [1752]	252 [2230]	308 [2726]	362 [3204]	417 [3690]	545
	68 [18]		32 [283]	87 [770]	143 [1266]	195 [1726]	249 [2204]	305 [2699]	360 [3186]	415 [3673]	607
	76 [20]		28 [248]	82 [726]	138 [1221]	191 [1690]	245 [2168]	300 [2655]	357 [3159]	412 [3646]	679
	83 [22]			78 [690]	134 [1186]	185 [1637]	239 [2115]	296 [2620]	352 [3115]	408 [3611]	741
91 [24]			72 [637]	127 [1124]	181 [1602]	235 [2080]	291 [2575]	349 [3089]	406 [3593]	813	
95 [25]			70 [620]	125 [1106]	179 [1584]	233 [2062]	289 [2558]	346 [3062]	403 [3567]	848	
			<b>837</b>	<b>821</b>	<b>801</b>	<b>780</b>	<b>751</b>	<b>714</b>	<b>668</b>		
		Torque - Nm [lb-in], Speed rpm					Overall Efficiency - 70 - 100% <input type="checkbox"/> 40 - 69% <input type="checkbox"/> 0 - 39% <input type="checkbox"/>				
		30 [268]	62 [552]	123 [1089]	185 [1641]	246 [2177]	307 [2713]	369 [3266]	431 [3181]	492 [4354]	
		Theoretical Torque - Nm [lb-in]					Displacement tested at 54°C [129°F] with an oil viscosity of 46cSt [213 SUS]				
		Rotor Width		mm [in]		22.1 [0.871]					

		Pressure - bar [psi]					Max. Cont.		Max. Inter.		
<b>130</b>		17 [250]	35 [500]	69 [1000]	104 [1500]	138 [2000]	172 [2500]	207 [3000]	242 [3500]	276 [4000]	
129 cm <sup>3</sup> [7.9 in <sup>3</sup> ] / rev		Intermittent Ratings are below and to the right of the BOLD line.					Intermittent Ratings - 10% of Operation				
Flow - lpm [gpm]	2 [0.5]	23 [204]	53 [469]								16
	4 [1]	24 [212]	55 [487]	113 [1000]	167 [1478]	225 [1991]					31
	8 [2]	25 [221]	57 [504]	119 [1053]	179 [1584]	234 [2071]	290 [2567]	331 [2929]			62
	15 [4]	26 [230]	58 [513]	122 [1080]	186 [1646]	247 [2186]	306 [2708]	363 [3213]	416 [3682]		116
	23 [6]	25 [221]	57 [504]	122 [1080]	187 [1655]	250 [2213]	312 [2761]	373 [3301]	431 [3814]	483 [4275]	178
	30 [8]	23 [204]	57 [504]	120 [1062]	186 [1646]	250 [2213]	313 [2770]	376 [3328]	437 [3867]	494 [4372]	233
	38 [10]	22 [195]	54 [478]	118 [1044]	184 [1628]	248 [2195]	312 [2761]	376 [3328]	439 [3885]	499 [4416]	295
	45 [12]	20 [177]	53 [469]	116 [1027]	183 [1620]	246 [2177]	310 [2744]	375 [3319]	439 [3885]	499 [4416]	349
	53 [14]		49 [434]	113 [1000]	179 [1584]	243 [2151]	307 [2717]	373 [3301]	437 [3867]	499 [4416]	411
	61 [16]		46 [407]	110 [974]	176 [1558]	240 [2124]	304 [2690]	370 [3275]	435 [3850]	497 [4398]	473
	68 [18]		42 [372]	106 [938]	172 [1522]	236 [2089]	300 [2655]	366 [3239]	432 [3823]	495 [4381]	527
	76 [20]		38 [336]	102 [903]	167 [1478]	232 [2053]	297 [2628]	363 [3213]	428 [3788]	491 [4345]	589
	83 [22]		33 [292]	98 [867]	164 [1451]	228 [2018]	293 [2593]	359 [3177]	423 [3744]	485 [4292]	643
91 [24]		30 [266]	93 [823]	158 [1398]	222 [1965]	288 [2549]	354 [3133]	421 [3726]	483 [4275]	705	
95 [25]		27 [239]	91 [805]	158 [1398]	220 [1947]	286 [2531]	351 [3106]	419 [3708]	483 [4275]	736	
			<b>733</b>	<b>720</b>	<b>703</b>	<b>672</b>	<b>639</b>	<b>602</b>	<b>559</b>		
		Torque - Nm [lb-in], Speed rpm					Overall Efficiency - 70 - 100% <input type="checkbox"/> 40 - 69% <input type="checkbox"/> 0 - 39% <input type="checkbox"/>				
		35 [309]	72 [636]	142 [1254]	214 [1890]	283 [2508]	353 [3125]	425 [3761]	497 [4397]	567 [5015]	
		Theoretical Torque - Nm [lb-in]					Displacement tested at 54°C [129°F] with an oil viscosity of 46cSt [213 SUS]				
		Rotor Width		mm [in]		25.4 [1.000]					

<b>160</b>		Pressure - bar [psi]					Max. Cont.		Max. Inter.	
		17 [250]	35 [500]	69 [1000]	104 [1500]	138 [2000]	172 [2500]	207 [3000]	242 [3500]	276 [4000]
161 cm <sup>3</sup> [9.8 in <sup>3</sup> ] / rev										
Intermittent Ratings are below and to the right of the <b>BOLD</b> line. Intermittent Ratings - 10% of Operation										
Flow - lpm [gpm]	2 [0.5]	21 [186] <b>11</b>	65 [575] <b>10</b>							
	4 [1]	29 [257] <b>24</b>	67 [593] <b>24</b>	140 [1239] <b>23</b>	209 [1850] <b>21</b>					
	8 [2]	31 [274] <b>49</b>	71 [628] <b>48</b>	143 [1266] <b>47</b>	214 [1894] <b>46</b>	285 [2522] <b>43</b>	352 [3115] <b>36</b>			
	15 [4]	34 [301] <b>92</b>	75 [664] <b>92</b>	154 [1363] <b>91</b>	231 [2044] <b>88</b>	306 [2708] <b>84</b>	380 [3363] <b>77</b>	454 [4018] <b>64</b>	519 [4593] <b>43</b>	
	23 [6]	32 [283] <b>142</b>	75 [664] <b>141</b>	155 [1372] <b>140</b>	235 [2080] <b>139</b>	314 [2779] <b>133</b>	390 [3452] <b>123</b>	466 [4124] <b>108</b>	537 [4752] <b>85</b>	604 [5345] <b>52</b>
	30 [8]	31 [274] <b>185</b>	73 [646] <b>185</b>	154 [1363] <b>184</b>	234 [2071] <b>183</b>	315 [2788] <b>178</b>	394 [3487] <b>166</b>	472 [4177] <b>151</b>	547 [4841] <b>130</b>	615 [5443] <b>99</b>
	38 [10]	28 [248] <b>233</b>	72 [637] <b>231</b>	153 [1354] <b>229</b>	231 [2044] <b>229</b>	311 [2752] <b>223</b>	391 [3460] <b>210</b>	471 [4168] <b>194</b>	548 [4850] <b>175</b>	620 [5487] <b>144</b>
	45 [12]	25 [221] <b>280</b>	67 [593] <b>280</b>	151 [1336] <b>272</b>	229 [2027] <b>269</b>	310 [2744] <b>260</b>	391 [3460] <b>243</b>	466 [4124] <b>227</b>	544 [4814] <b>202</b>	624 [5522] <b>159</b>
	53 [14]	23 [204] <b>328</b>	63 [558] <b>327</b>	145 [1283] <b>320</b>	227 [2009] <b>312</b>	307 [2717] <b>303</b>	388 [3434] <b>288</b>	467 [4133] <b>271</b>	548 [4850] <b>247</b>	622 [5505] <b>216</b>
	61 [16]		58 [513] <b>378</b>	139 [1230] <b>372</b>	221 [1956] <b>366</b>	302 [2673] <b>361</b>	386 [3416] <b>350</b>	468 [4142] <b>328</b>	549 [4859] <b>305</b>	626 [5540] <b>273</b>
	68 [18]		53 [469] <b>418</b>	135 [1195] <b>412</b>	217 [1920] <b>410</b>	298 [2637] <b>406</b>	380 [3363] <b>389</b>	468 [4142] <b>370</b>	549 [4859] <b>348</b>	627 [5549] <b>312</b>
	76 [20]		53 [469] <b>471</b>	133 [1177] <b>467</b>	216 [1912] <b>455</b>	296 [2620] <b>440</b>	377 [3336] <b>423</b>	461 [4080] <b>397</b>	544 [4814] <b>368</b>	609 [5390] <b>348</b>
	83 [22]		44 [389] <b>515</b>	126 [1115] <b>514</b>	205 [1814] <b>513</b>	282 [2496] <b>504</b>	359 [3177] <b>491</b>	440 [3894] <b>467</b>	523 [4629] <b>434</b>	602 [5328] <b>384</b>
	91 [24]		38 [336] <b>560</b>	119 [1053] <b>556</b>	207 [1832] <b>547</b>	284 [2513] <b>546</b>	368 [3257] <b>532</b>	440 [3894] <b>515</b>	521 [4611] <b>493</b>	606 [5363] <b>461</b>
95 [25]		34 [301] <b>585</b>	112 [991] <b>580</b>	194 [1717] <b>579</b>	276 [2443] <b>574</b>	365 [3230] <b>555</b>	445 [3938] <b>540</b>			
114 [30]			94 [832] <b>707</b>	177 [1566] <b>706</b>	269 [2381] <b>687</b>	341 [3018] <b>676</b>	418 [3699] <b>654</b>			
<b>Rotor Width</b>		Torque - Nm [lb-in], Speed rpm								
31.8 [1.251] mm [in]		Overall Efficiency - 70 - 100% <input type="checkbox"/> 40 - 69% <input type="checkbox"/> 0 - 39% <input type="checkbox"/>								
		44 [386]	90 [794]	177 [1565]	266 [2358]	354 [3130]	441 [3901]	530 [4694]	620 [5488]	707 [6259]
		Theoretical Torque - Nm [lb-in] Displacement tested at 54°C [129°F] with an oil viscosity of 46cSt [213 SUS]								

12
25
50
93
143
186
236
280
329
379
422
472
516
565
590
708

<b>200</b>		Pressure - bar [psi]					Max. Cont.		Max. Inter.		
		17 [250]	35 [500]	69 [1000]	104 [1500]	138 [2000]	172 [2500]	190 [2750]	207 [3000]	242 [3500]	276 [4000]
201 cm <sup>3</sup> [12.3 in <sup>3</sup> ] / rev											
Intermittent Ratings are below and to the right of the <b>BOLD</b> line. Intermittent Ratings - 10% of Operation											
Flow - lpm [gpm]	4 [1]	40 [354] <b>19</b>	87 [770] <b>18</b>	189 [1673] <b>17</b>	282 [2496] <b>15</b>						
	8 [2]	44 [389] <b>39</b>	97 [858] <b>39</b>	192 [1699] <b>38</b>	286 [2531] <b>37</b>	370 [3275] <b>36</b>	456 [4036] <b>33</b>				
	15 [4]	45 [398] <b>74</b>	99 [876] <b>74</b>	198 [1752] <b>73</b>	298 [2637] <b>71</b>	391 [3460] <b>67</b>	481 [4257] <b>63</b>	526 [4655] <b>60</b>	566 [5009] <b>57</b>	645 [5708] <b>50</b>	
	23 [6]	42 [372] <b>113</b>	97 [858] <b>113</b>	196 [1735] <b>112</b>	296 [2620] <b>108</b>	389 [3443] <b>104</b>	478 [4230] <b>98</b>	523 [4629] <b>93</b>	568 [5027] <b>93</b>	653 [5779] <b>80</b>	724 [6407] <b>66</b>
	30 [8]	40 [354] <b>148</b>	94 [832] <b>147</b>	194 [1717] <b>146</b>	293 [2593] <b>142</b>	388 [3434] <b>136</b>	478 [4230] <b>129</b>	525 [4646] <b>125</b>	568 [5027] <b>121</b>	658 [5823] <b>109</b>	724 [6407] <b>96</b>
	38 [10]	36 [319] <b>188</b>	91 [805] <b>187</b>	191 [1690] <b>186</b>	292 [2584] <b>181</b>	388 [3434] <b>175</b>	483 [4275] <b>167</b>	533 [4717] <b>162</b>	579 [5124] <b>158</b>	672 [5947] <b>146</b>	759 [6717] <b>126</b>
	45 [12]	32 [283] <b>223</b>	87 [770] <b>222</b>	186 [1646] <b>221</b>	288 [2549] <b>217</b>	386 [3416] <b>208</b>	482 [4266] <b>198</b>	532 [4708] <b>194</b>	579 [5124] <b>188</b>	675 [5974] <b>175</b>	765 [6770] <b>162</b>
	53 [14]	30 [266] <b>263</b>	81 [717] <b>262</b>	181 [1602] <b>261</b>	283 [2505] <b>257</b>	382 [3381] <b>248</b>	479 [4239] <b>236</b>	528 [4673] <b>235</b>	576 [5098] <b>224</b>	673 [5956] <b>212</b>	765 [6770] <b>194</b>
	61 [16]	27 [239] <b>302</b>	72 [637] <b>301</b>	172 [1522] <b>299</b>	276 [2443] <b>297</b>	375 [3319] <b>288</b>	473 [4186] <b>276</b>	524 [4637] <b>269</b>	571 [5053] <b>263</b>	667 [5903] <b>248</b>	761 [6735] <b>231</b>
	68 [18]		66 [584] <b>337</b>	167 [1478] <b>336</b>	269 [2381] <b>332</b>	368 [3257] <b>324</b>	466 [4124] <b>312</b>	518 [4584] <b>303</b>	566 [5009] <b>297</b>	664 [5876] <b>279</b>	757 [6699] <b>262</b>
	76 [20]		58 [513] <b>377</b>	157 [1389] <b>375</b>	260 [2301] <b>372</b>	359 [3177] <b>364</b>	457 [4044] <b>353</b>	510 [4514] <b>343</b>	559 [4947] <b>336</b>	656 [5806] <b>320</b>	751 [6646] <b>302</b>
	83 [22]		50 [443] <b>412</b>	153 [1354] <b>410</b>	251 [2221] <b>408</b>	352 [3115] <b>398</b>	449 [3974] <b>387</b>	503 [4452] <b>377</b>	550 [4868] <b>372</b>		
	91 [24]		41 [363] <b>452</b>	145 [1283] <b>450</b>	244 [2159] <b>448</b>	346 [3062] <b>436</b>	445 [3938] <b>421</b>	496 [4390] <b>415</b>	538 [4761] <b>410</b>		
	95 [25]			139 [1230] <b>472</b>	239 [2115] <b>466</b>	339 [3000] <b>456</b>	438 [3876] <b>441</b>	491 [4345] <b>430</b>	539 [4770] <b>423</b>		
114 [30]			116 [1027] <b>566</b>	213 [1885] <b>561</b>	313 [2770] <b>549</b>	416 [3682] <b>531</b>	468 [4142] <b>521</b>	512 [4531] <b>519</b>			
<b>Rotor Width</b>		Torque - Nm [lb-in], Speed rpm									
39.4 [1.552] mm [in]		Overall Efficiency - 70 - 100% <input type="checkbox"/> 40 - 69% <input type="checkbox"/> 0 - 39% <input type="checkbox"/>									
		54 [481]	112 [991]	221 [1954]	333 [2944]	441 [3907]	550 [4870]	608 [5379]	662 [5861]	774 [6852]	883 [7814]
		Theoretical Torque - Nm [lb-in] Displacement tested at 54°C [129°F] with an oil viscosity of 46cSt [213 SUS]									

20
40
75
114
149
189
224
264
303
338
378
413
453
473
567

WHITE can accept no responsibility for possible errors in catalogues, brochures, and other printed material. WHITE reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary in specifications already agreed.

All trademarks in this material are the property of the respective companies. WHITE and the WHITE logotype are trademarks of WHITE Drive Motors & Steering LLC and WHITE Drive Motors and Steering Sp. z o.o..

All rights reserved.

<b>230</b>	Pressure - bar [psi]								Max. Cont.	Max. Inter.		
	17 [250]	35 [500]	69 [1000]	104 [1500]	138 [2000]	172 [2500]	190 [2750]	207 [3000]	242 [3500]	276 [4000]		
229 cm <sup>3</sup> [14.0 in <sup>3</sup> ] / rev												
Intermittent Ratings are below and to the right of the BOLD line.					Intermittent Ratings - 10% of Operation							
Flow - lpm [gpm]	4 [1]	50 [443] <b>16</b>	98 [867] <b>15</b>	198 [1752] <b>14</b>	310 [2744] <b>13</b>						17	
	8 [2]	42 [372] <b>34</b>	99 [876] <b>34</b>	204 [1805] <b>34</b>	316 [2797] <b>33</b>	416 [3682] <b>32</b>	510 [4514] <b>28</b>	552 [4885] <b>25</b>	594 [5257] <b>22</b>		35	
	15 [4]	47 [416] <b>65</b>	104 [920] <b>64</b>	214 [1894] <b>63</b>	325 [2876] <b>62</b>	426 [3770] <b>58</b>	526 [4655] <b>55</b>	580 [5133] <b>51</b>	626 [5540] <b>47</b>	721 [6381] <b>37</b>	66	
	23 [6]	45 [398] <b>99</b>	105 [929] <b>99</b>	218 [1929] <b>98</b>	331 [2929] <b>96</b>	438 [3876] <b>93</b>	544 [4814] <b>87</b>	598 [5292] <b>83</b>	649 [5744] <b>79</b>	752 [6655] <b>67</b>	843 [7461] <b>50</b>	100
	30 [8]	43 [381] <b>130</b>	103 [912] <b>129</b>	217 [1920] <b>127</b>	332 [2938] <b>125</b>	441 [3903] <b>121</b>	549 [4859] <b>116</b>	602 [5328] <b>111</b>	654 [5788] <b>106</b>	758 [6708] <b>39</b>	859 [7602] <b>76</b>	131
	38 [10]	40 [354] <b>165</b>	100 [885] <b>164</b>	214 [1894] <b>162</b>	330 [2921] <b>159</b>	440 [3894] <b>154</b>	548 [4850] <b>148</b>	604 [5345] <b>144</b>	655 [5797] <b>138</b>	761 [6735] <b>123</b>	866 [7664] <b>105</b>	166
	45 [12]	35 [310] <b>196</b>	95 [841] <b>194</b>	211 [1867] <b>192</b>	328 [2903] <b>189</b>	438 [3876] <b>184</b>	546 [4832] <b>177</b>	604 [5345] <b>172</b>	656 [5806] <b>167</b>	764 [6716] <b>152</b>	869 [7691] <b>130</b>	197
	53 [14]	30 [266] <b>230</b>	90 [797] <b>230</b>	206 [1823] <b>227</b>	323 [2859] <b>223</b>	435 [3850] <b>217</b>	544 [4814] <b>210</b>	601 [5319] <b>204</b>	654 [5788] <b>197</b>	763 [6753] <b>183</b>	871 [7708] <b>113</b>	231
	61 [16]	28 [248] <b>265</b>	84 [743] <b>265</b>	200 [1770] <b>262</b>	317 [2805] <b>257</b>	430 [3806] <b>251</b>	540 [4779] <b>243</b>	598 [5292] <b>237</b>	652 [5770] <b>231</b>	763 [6753] <b>216</b>	872 [7717] <b>192</b>	266
	68 [18]		77 [681] <b>295</b>	191 [1690] <b>292</b>	311 [2752] <b>288</b>	425 [3761] <b>281</b>	536 [4744] <b>272</b>	593 [5248] <b>266</b>	648 [5735] <b>260</b>	759 [6717] <b>244</b>	869 [7691] <b>222</b>	297
	76 [20]		68 [602] <b>330</b>	184 [1628] <b>327</b>	302 [2673] <b>323</b>	416 [3682] <b>316</b>	529 [4682] <b>306</b>	586 [5186] <b>300</b>	642 [5682] <b>294</b>			332
	83 [22]		58 [513] <b>361</b>	176 [1558] <b>358</b>	295 [2611] <b>353</b>	410 [3629] <b>346</b>	523 [4629] <b>336</b>	580 [5133] <b>329</b>	636 [5629] <b>323</b>			362
	91 [24]		51 [451] <b>396</b>	167 [1478] <b>393</b>	285 [2522] <b>388</b>	400 [3540] <b>380</b>	513 [4531] <b>370</b>	571 [5053] <b>363</b>	627 [5549] <b>357</b>			397
	95 [25]			164 [1451] <b>411</b>	250 [2478] <b>406</b>	395 [3496] <b>399</b>	507 [4487] <b>389</b>	564 [4991] <b>382</b>	622 [5505] <b>375</b>			415
114 [30]			130 [1151] <b>495</b>	253 [2239] <b>489</b>	368 [3257] <b>480</b>	483 [4275] <b>467</b>	541 [4788] <b>460</b>	594 [5257] <b>452</b>			498	
Rotor Width												
Torque - Nm [lb-in], Speed rpm												
Overall Efficiency - 70 - 100% <input type="checkbox"/> 40 - 69% <input type="checkbox"/> 0 - 39% <input type="checkbox"/>												
45.5 [1.791] mm [in]												
Theoretical Torque - Nm [lb-in]												
Displacement tested at 54°C [129°F] with an oil viscosity of 46cSt [213 SUS]												

<b>250</b>	Pressure - bar [psi]								Max. Cont.	Max. Inter.		
	17 [250]	35 [500]	69 [1000]	104 [1500]	138 [2000]	155 [2250]	172 [2500]	190 [2750]	207 [3000]	224 [3250]		
248 cm <sup>3</sup> [15.1 in <sup>3</sup> ] / rev												
Intermittent Ratings are below and to the right of the BOLD line.					Intermittent Ratings - 10% of Operation							
Flow - lpm [gpm]	4 [1]	51 [481] <b>15</b>	112 [991] <b>15</b>	230 [2036] <b>14</b>							16	
	8 [2]	53 [469] <b>31</b>	118 [1044] <b>31</b>	236 [2089] <b>30</b>	355 [3142] <b>28</b>	464 [4106] <b>23</b>	522 [4620] <b>19</b>	575 [5089] <b>15</b>			32	
	15 [4]	50 [443] <b>59</b>	119 [1053] <b>59</b>	239 [2115] <b>58</b>	361 [3195] <b>54</b>	476 [4213] <b>46</b>	531 [4699] <b>42</b>	586 [5186] <b>37</b>	644 [5699] <b>31</b>	696 [6160] <b>26</b>	740 [6549] <b>22</b>	60
	23 [6]	50 [443] <b>92</b>	115 [1018] <b>92</b>	237 [2097] <b>90</b>	360 [3186] <b>83</b>	476 [4213] <b>74</b>	525 [4646] <b>70</b>	585 [5177] <b>64</b>	640 [5664] <b>58</b>	697 [6168] <b>52</b>	751 [6646] <b>47</b>	93
	30 [8]	47 [416] <b>120</b>	111 [982] <b>120</b>	234 [2071] <b>117</b>	357 [3159] <b>110</b>	475 [4204] <b>101</b>	531 [4699] <b>93</b>	598 [5292] <b>87</b>	657 [5814] <b>78</b>	712 [6301] <b>72</b>	759 [6717] <b>71</b>	121
	38 [10]	42 [372] <b>152</b>	108 [956] <b>151</b>	231 [2044] <b>150</b>	355 [3142] <b>144</b>	475 [4204] <b>131</b>	533 [4717] <b>126</b>	591 [5230] <b>119</b>	654 [5788] <b>108</b>	707 [6257] <b>105</b>	769 [6806] <b>90</b>	153
	45 [12]	35 [310] <b>180</b>	102 [903] <b>180</b>	225 [1991] <b>179</b>	351 [3106] <b>172</b>	469 [4151] <b>162</b>	528 [4673] <b>155</b>	585 [5177] <b>147</b>	647 [5726] <b>138</b>	704 [6230] <b>130</b>	755 [6682] <b>119</b>	181
	53 [14]	32 [283] <b>213</b>	92 [814] <b>213</b>	216 [1912] <b>212</b>	342 [3027] <b>205</b>	462 [4089] <b>193</b>	521 [4611] <b>187</b>	580 [5133] <b>181</b>	641 [5673] <b>170</b>	698 [6177] <b>163</b>	754 [6673] <b>152</b>	214
	61 [16]	29 [257] <b>245</b>	83 [735] <b>244</b>	210 [1859] <b>244</b>	333 [2947] <b>238</b>	454 [4018] <b>226</b>	512 [4531] <b>221</b>	571 [5053] <b>213</b>	633 [5602] <b>203</b>	691 [6115] <b>196</b>	746 [6602] <b>184</b>	246
	68 [18]	27 [239] <b>273</b>	73 [646] <b>272</b>	200 [1770] <b>271</b>	323 [2859] <b>267</b>	445 [3938] <b>256</b>	504 [4460] <b>249</b>	563 [4983] <b>240</b>	623 [5514] <b>231</b>			274
	76 [20]		63 [558] <b>305</b>	188 [1664] <b>303</b>	310 [2744] <b>301</b>	433 [3832] <b>289</b>	494 [4372] <b>283</b>	552 [4885] <b>273</b>	613 [5425] <b>267</b>			306
	83 [22]		57 [504] <b>334</b>	179 [1584] <b>334</b>	302 [2673] <b>328</b>	425 [3761] <b>314</b>	484 [4283] <b>307</b>	545 [4823] <b>297</b>	608 [5381] <b>286</b>			335
	91 [24]		41 [363] <b>366</b>	171 [1513] <b>364</b>	291 [2575] <b>358</b>	413 [3655] <b>343</b>	476 [4213] <b>334</b>	534 [4726] <b>327</b>	596 [5275] <b>316</b>			367
	95 [25]		32 [283] <b>382</b>	160 [1416] <b>381</b>	280 [2478] <b>381</b>	401 [3549] <b>368</b>	463 [4098] <b>359</b>	524 [4637] <b>348</b>	584 [5168] <b>341</b>			383
114 [30]			128 [1133] <b>459</b>	246 [2177] <b>456</b>	372 [3292] <b>442</b>	431 [3814] <b>434</b>	494 [4372] <b>422</b>	554 [4903] <b>412</b>			460	
Rotor Width												
Torque - Nm [lb-in], Speed rpm												
Overall Efficiency - 70 - 100% <input type="checkbox"/> 40 - 69% <input type="checkbox"/> 0 - 39% <input type="checkbox"/>												
39.4 [1.552] mm [in]												
Theoretical Torque - Nm [lb-in]												
Displacement tested at 54°C [129°F] with an oil viscosity of 46cSt [213 SUS]												

WHITE can accept no responsibility for possible errors in catalogues, brochures, and other printed material. WHITE reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary in specifications already agreed.

All trademarks in this material are the property of the respective companies. WHITE and the WHITE logotype are trademarks of WHITE Drive Motors & Steering LLC and WHITE Drive Motors and Steering Sp. z o.o.

All rights reserved.



		Pressure - bar [psi]										Max. Cont.		Max. Inter.	
<b>320</b>		17 [250]	35 [500]	69 [1000]	104 [1500]	138 [2000]	155 [2250]	172 [2500]	190 [2750]	207 [3000]	224 [3250]				
322 cm <sup>3</sup> [19.6 in <sup>3</sup> ] / rev		Intermittent Ratings are below and to the right of the BOLD line.										Intermittent Ratings - 10% of Operation			
Flow - lpm [gpm]	4 [1]	68 [602] <b>11</b>	145 [1283] <b>9</b>												12
	8 [2]	77 [681] <b>24</b>	156 [1381] <b>24</b>	311 [2752] <b>23</b>	455 [4027] <b>21</b>	590 [5222] <b>20</b>	640 [5664] <b>19</b>								25
	15 [4]	77 [681] <b>46</b>	160 [1416] <b>45</b>	311 [2752] <b>43</b>	458 [4053] <b>40</b>	594 [5257] <b>36</b>	655 [5797] <b>32</b>	705 [6239] <b>28</b>	770 [6815] <b>24</b>	835 [7390] <b>18</b>					47
	23 [6]	73 [646] <b>70</b>	157 [1389] <b>69</b>	316 [2797] <b>68</b>	478 [4230] <b>64</b>	628 [5558] <b>57</b>	698 [6177] <b>53</b>	768 [6797] <b>48</b>	841 [7443] <b>43</b>	910 [8054] <b>38</b>	975 [8629] <b>30</b>				71
	30 [8]	69 [611] <b>92</b>	154 [1363] <b>90</b>	316 [2797] <b>87</b>	479 [4239] <b>83</b>	631 [5584] <b>77</b>	705 [6239] <b>73</b>	780 [6903] <b>68</b>	860 [7611] <b>63</b>	929 [8222] <b>57</b>	998 [8832] <b>49</b>				93
	38 [10]	64 [566] <b>116</b>	150 [1328] <b>114</b>	311 [2752] <b>111</b>	480 [4248] <b>106</b>	631 [5584] <b>100</b>	709 [6275] <b>96</b>	784 [6938] <b>90</b>	861 [7620] <b>83</b>	930 [8231] <b>79</b>	1000 [8850] <b>72</b>				118
	45 [12]	59 [522] <b>138</b>	143 [1266] <b>136</b>	305 [2699] <b>133</b>	471 [4168] <b>127</b>	632 [5593] <b>119</b>	705 [6239] <b>115</b>	783 [6930] <b>110</b>	860 [7611] <b>105</b>	934 [8266] <b>98</b>	1000 [8850] <b>86</b>				140
	53 [14]	49 [434] <b>162</b>	137 [1212] <b>160</b>	297 [2628] <b>157</b>	463 [4098] <b>151</b>	627 [5549] <b>142</b>	697 [6168] <b>138</b>	778 [6885] <b>132</b>	858 [7593] <b>126</b>	937 [8292] <b>120</b>	1003 [8877] <b>113</b>				165
	61 [16]	41 [363] <b>187</b>	128 [1133] <b>185</b>	288 [2549] <b>182</b>	457 [4044] <b>175</b>	616 [5452] <b>167</b>	689 [6098] <b>161</b>	769 [6806] <b>156</b>	847 [7496] <b>150</b>						189
	68 [18]	35 [310] <b>210</b>	120 [1062] <b>208</b>	282 [2496] <b>201</b>	452 [4000] <b>192</b>	609 [5390] <b>182</b>	683 [6045] <b>176</b>	762 [6744] <b>170</b>	841 [7443] <b>163</b>						211
	76 [20]	26 [230] <b>235</b>	113 [1000] <b>230</b>	273 [2416] <b>225</b>	443 [3921] <b>216</b>	603 [5337] <b>203</b>	664 [5876] <b>199</b>	744 [6584] <b>192</b>	830 [7346] <b>184</b>						236
	83 [22]		99 [876] <b>256</b>	262 [2319] <b>247</b>	430 [3806] <b>240</b>	590 [5222] <b>225</b>	660 [5841] <b>219</b>	741 [6558] <b>212</b>	820 [7257] <b>202</b>						258
	91 [24]		85 [752] <b>282</b>	246 [2177] <b>273</b>	415 [3673] <b>267</b>	576 [5098] <b>249</b>	654 [5788] <b>242</b>	731 [6469] <b>233</b>	810 [7169] <b>225</b>						283
	95 [25]		76 [673] <b>294</b>	241 [2133] <b>286</b>	404 [3575] <b>281</b>	571 [5053] <b>261</b>	648 [5735] <b>254</b>	719 [6363] <b>246</b>	804 [7115] <b>236</b>						295
114 [30]		44 [389] <b>352</b>	204 [1805] <b>345</b>	371 [3283] <b>337</b>	538 [4761] <b>321</b>	602 [5328] <b>314</b>	685 [6062] <b>304</b>	766 [6779] <b>293</b>						354	
Rotor Width		Torque - Nm [lb-in], Speed rpm													
63.5 [2.501]		Overall Efficiency - 70 - 100% <input type="checkbox"/> 40 - 69% <input type="checkbox"/> 0 - 39% <input type="checkbox"/>													
mm [in]		87 [771]	179 [1587]	354 [3130]	533 [4717]	707 [6259]	794 [7030]	881 [7801]	974 [8618]	1061 [9389]	1148 [10160]				
		Theoretical Torque - Nm [lb-in] Displacement tested at 54°C [129°F] with an oil viscosity of 46cSt [213 SUS]													

		Pressure - bar [psi]										Max. Cont.		Max. Inter.	
<b>400</b>		17 [250]	35 [500]	69 [1000]	86 [1250]	104 [1500]	121 [1750]	138 [2000]	155 [2250]	172 [2500]	190 [2750]				
396 cm <sup>3</sup> [24.2 in <sup>3</sup> ] / rev		Intermittent Ratings are below and to the right of the BOLD line.										Intermittent Ratings - 10% of Operation			
Flow - lpm [gpm]	4 [1]	78 [690] <b>9</b>	180 [1593] <b>8</b>												10
	8 [2]	84 [743] <b>19</b>	185 [1637] <b>18</b>	380 [3363] <b>18</b>	460 [4071] <b>18</b>	555 [4912] <b>17</b>	640 [5664] <b>15</b>								20
	15 [4]	84 [743] <b>37</b>	185 [1637] <b>36</b>	374 [3310] <b>36</b>	468 [4142] <b>35</b>	559 [4947] <b>34</b>	648 [5735] <b>30</b>	736 [6514] <b>26</b>							38
	23 [6]	77 [681] <b>57</b>	182 [1611] <b>56</b>	374 [3310] <b>55</b>	469 [4151] <b>53</b>	567 [5018] <b>50</b>	650 [5753] <b>46</b>	747 [6611] <b>41</b>	839 [7425] <b>37</b>	920 [8142] <b>30</b>	1002 [8868] <b>24</b>				58
	30 [8]	76 [673] <b>75</b>	181 [1602] <b>74</b>	376 [3328] <b>71</b>	473 [4186] <b>69</b>	575 [5089] <b>65</b>	670 [5930] <b>61</b>	763 [6753] <b>56</b>	854 [7558] <b>50</b>	944 [8354] <b>43</b>	1043 [9231] <b>36</b>				76
	38 [10]	67 [593] <b>95</b>	175 [1549] <b>94</b>	375 [3319] <b>91</b>	473 [4186] <b>89</b>	575 [5089] <b>84</b>	671 [5938] <b>79</b>	764 [6761] <b>74</b>	858 [7593] <b>68</b>	951 [8416] <b>62</b>	1048 [9275] <b>55</b>				96
	45 [12]	57 [504] <b>113</b>	165 [1460] <b>112</b>	367 [3248] <b>109</b>	467 [4133] <b>106</b>	572 [5062] <b>102</b>	668 [5912] <b>97</b>	762 [6744] <b>90</b>	852 [7540] <b>82</b>	943 [8346] <b>77</b>	1044 [9239] <b>69</b>				114
	53 [14]	44 [389] <b>133</b>	154 [1363] <b>132</b>	355 [3142] <b>130</b>	454 [4018] <b>127</b>	560 [4956] <b>123</b>	659 [5832] <b>118</b>	756 [6691] <b>112</b>	851 [7531] <b>104</b>	943 [8346] <b>96</b>	1032 [9133] <b>84</b>				134
	61 [16]	32 [283] <b>153</b>	142 [1257] <b>149</b>	343 [3036] <b>149</b>	444 [3929] <b>146</b>	549 [4859] <b>141</b>	647 [5726] <b>135</b>	743 [6576] <b>129</b>	837 [7407] <b>123</b>	932 [8248] <b>114</b>					154
	68 [18]		123 [1089] <b>170</b>	332 [2938] <b>166</b>	432 [3823] <b>162</b>	538 [4761] <b>156</b>	635 [5620] <b>150</b>	726 [6425] <b>145</b>	827 [7319] <b>137</b>						172
	76 [20]		106 [938] <b>191</b>	316 [2797] <b>185</b>	418 [3699] <b>181</b>	523 [4629] <b>176</b>	619 [5478] <b>169</b>	717 [6345] <b>162</b>	812 [7186] <b>156</b>						192
	83 [22]		100 [885] <b>208</b>	299 [2646] <b>205</b>	402 [3558] <b>201</b>	506 [4478] <b>195</b>	601 [5319] <b>191</b>	700 [6195] <b>183</b>	797 [7053] <b>176</b>						210
	91 [24]		69 [611] <b>229</b>	277 [2451] <b>226</b>	378 [3345] <b>223</b>	479 [4239] <b>219</b>	579 [5124] <b>213</b>	676 [5983] <b>206</b>	773 [6841] <b>199</b>						230
	99 [26]		46 [407] <b>249</b>	257 [2274] <b>247</b>	353 [3124] <b>245</b>	454 [4018] <b>241</b>	555 [4912] <b>236</b>	658 [5823] <b>228</b>	752 [6655] <b>222</b>						250
114 [30]			210 [1859] <b>285</b>	307 [2717] <b>283</b>	416 [3682] <b>279</b>	517 [4575] <b>273</b>	614 [5434] <b>266</b>	710 [6284] <b>259</b>						288	
Rotor Width		Torque - Nm [lb-in], Speed rpm													
63.5 [2.501]		Overall Efficiency - 70 - 100% <input type="checkbox"/> 40 - 69% <input type="checkbox"/> 0 - 39% <input type="checkbox"/>													
mm [in]		107 [948]	221 [1952]	435 [3849]	542 [4797]	655 [5801]	763 [6749]	870 [7698]	977 [8646]	1084 [9594]	1198 [10598]				
		Theoretical Torque - Nm [lb-in] Displacement tested at 54°C [129°F] with an oil viscosity of 46cSt [213 SUS]													



### 4-Hole, Magneto Mount

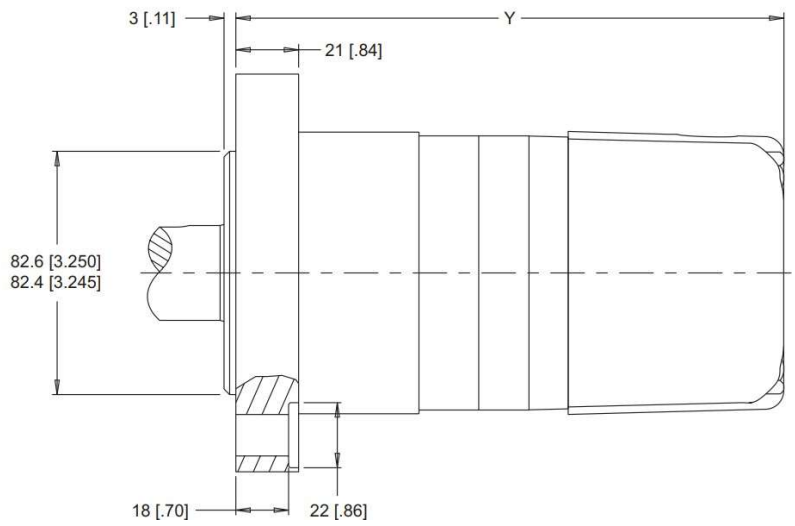
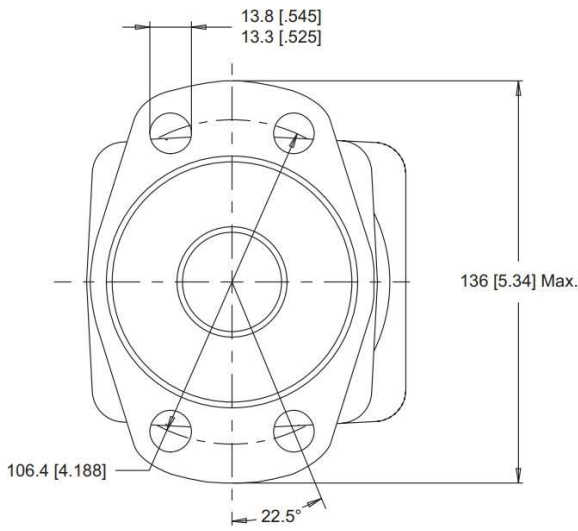


Figure 14 4-Hole, Magneto Mount

### 4-Hole, SAE A Mount

AG End Ports

AH Side Ports

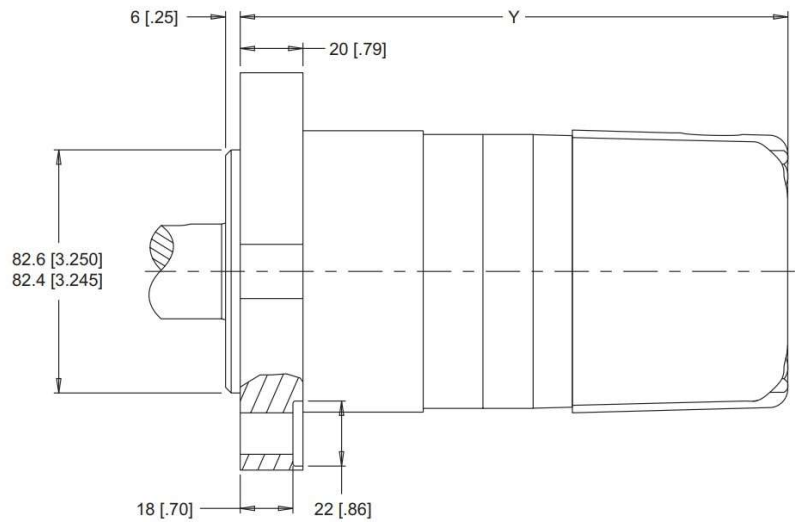
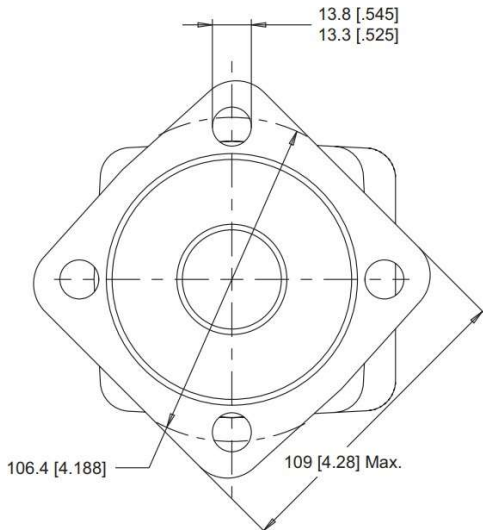


Figure 15 4-Hole, SAE A Mount

### 2-Hole, SAE B Mount

B0 End Ports

B7 Side Ports

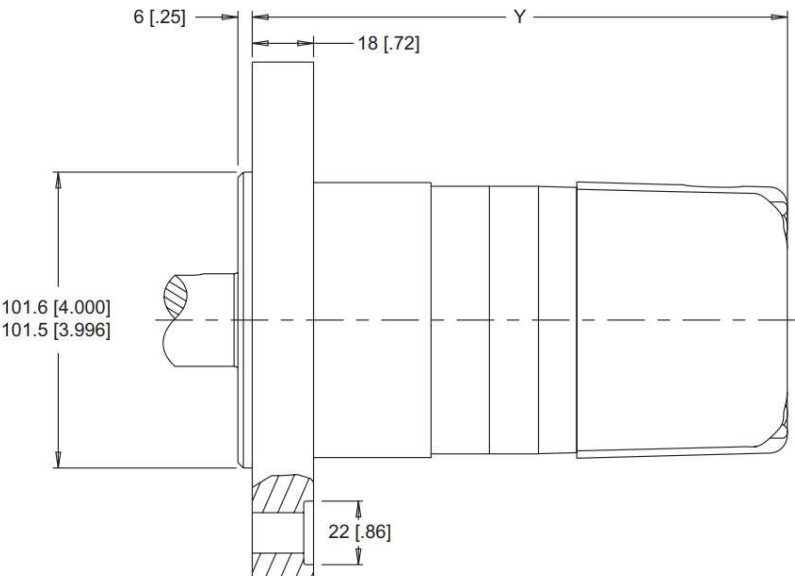
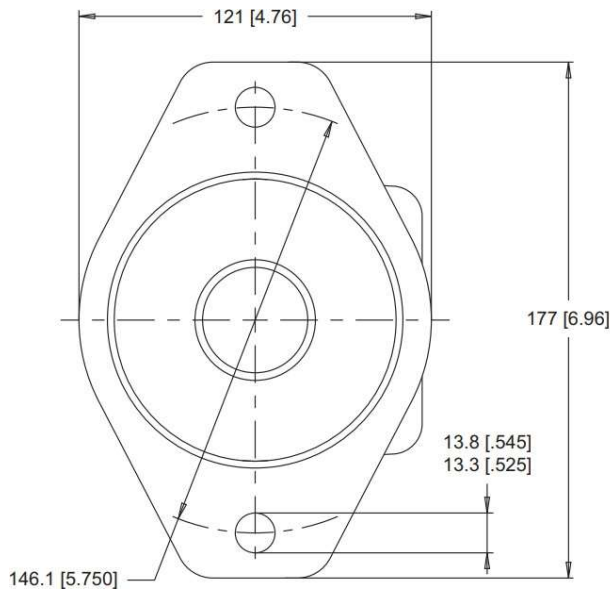


Figure 16 2-Hole, SAE B Mount

WHITE can accept no responsibility for possible errors in catalogues, brochures, and other printed material. WHITE reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary in specifications already agreed.

All trademarks in this material are the property of the respective companies. WHITE and the WHITE logotype are trademarks of WHITE Drive Motors & Steering LLC and WHITE Drive Motors and Steering Sp. z o.o..

All rights reserved.

**4-hole, 4.25" Wheel Mount**

**Y2** End Ports    **Y8** Side Ports

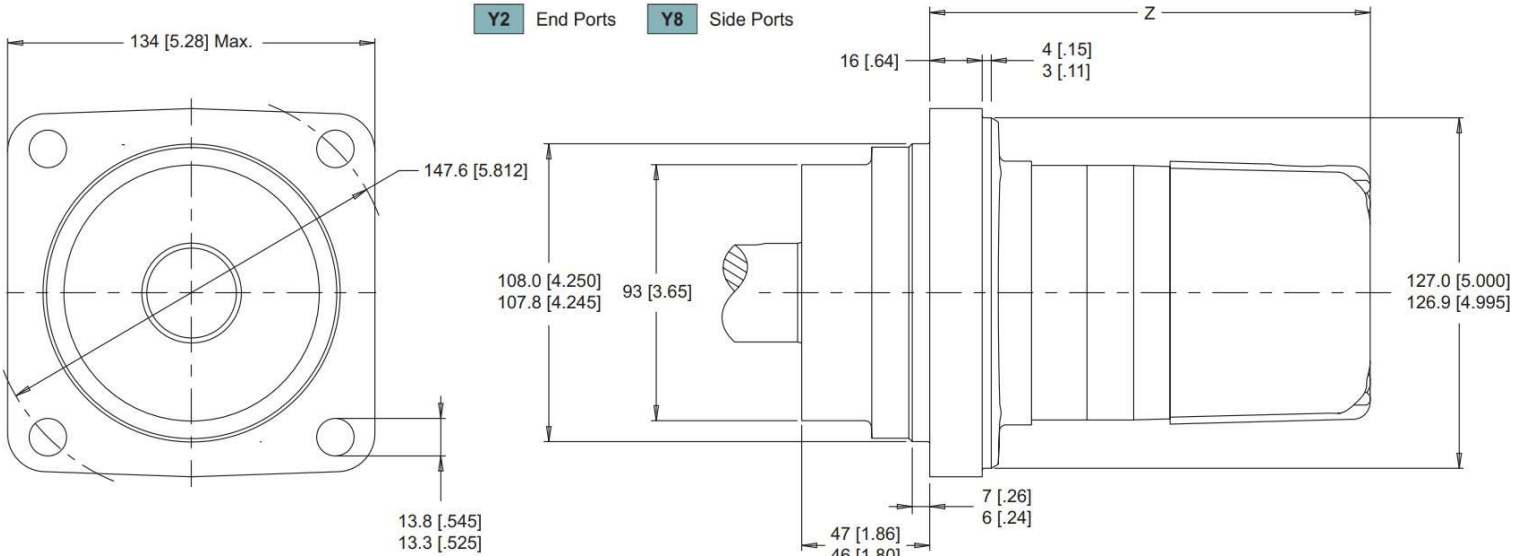


Figure 17 4-Hole, 4.25" Wheel Mount

**Length & Weight Charts**

Add 1.2 kg [2.6 lb] to the weight listed to the right for SAE B mount housings.

350 series motor weights can vary ± 1kg [2 lb] depending on model configurations such as housing, shaft, endcover, options etc.

	Y			Z	
	SAE A & B Mounts mm [in]	Magneto Mounts mm [in]	Weight kg [lb]	Length mm [in]	Weight kg [lb]
<b>080</b>	181	185	11.0	141	12.2
	7.12	7.27	24.2	5.55	26.9
<b>100</b>	185	189	11.3	145	12.5
	7.27	7.42	24.9	5.69	27.5
<b>110</b>	187	191	11.4	147	12.6
	7.36	7.51	25.1	5.78	27.7
<b>130</b>	190	194	11.5	150	12.7
	7.49	7.64	25.3	5.91	27.9
<b>160</b>	197	201	11.8	157	13.0
	7.74	7.89	26.0	6.16	28.6
<b>200</b>	204	208	12.2	164	13.4
	8.04	8.19	26.8	6.46	29.5
<b>230</b>	210	214	12.6	170	13.8
	8.28	8.43	27.7	6.70	30.4
<b>250</b>	204	208	12.2	164	13.4
	8.04	8.19	26.8	6.46	29.5
<b>320</b>	228	232	13.5	188	14.7
	8.99	9.14	29.7	7.41	32.3
<b>400</b>	228	232	13.5	188	14.7
	8.99	9.14	29.7	7.41	32.3
<b>500</b>	244	248	14.2	204	15.4
	9.60	9.75	31.2	8.02	33.9

Table 5 Y,Z dimension

WHITE can accept no responsibility for possible errors in catalogues, brochures, and other printed material. WHITE reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary in specifications already agreed.

All trademarks in this material are the property of the respective companies. WHITE and the WHITE logotype are trademarks of WHITE Drive Motors & Steering LLC and WHITE Drive Motors and Steering Sp. z o.o..

All rights reserved.

## Technical Information

### Allowable Shaft Load / Bearing Curve

The bearing curve represents allowable bearing loads for a B10 life of 2,000 hours at 100 rpm. The curve includes affects of 1,000 lbs inward/outward net thrust\*. Radial loads for speeds other than 100 rpm may be calculated using the multiplication factor on page with *Allowable Bearing & Shaft Loading*.

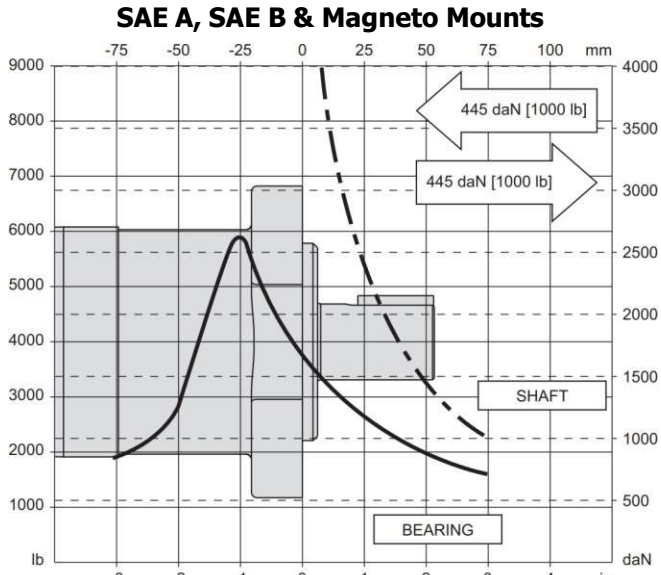


Figure 18 SAE A, SAE B & Magneto Mounts Allowable Shaft Load/Bearing Curve

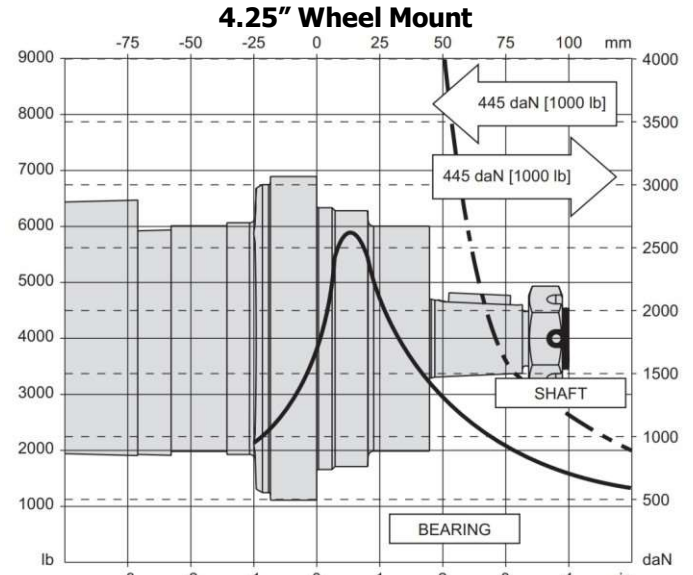


Figure 19 4.25" Wheel Mount Allowable Shaft Load/Bearing Curve

Case pressure will push outward on the shaft. If case drain line is attached and routed directly to tank, case pressure should be negligible. If case drain line is not attached, case pressure will be nearly the same as motor return pressure. When case pressure is acting, the allowable inward axial load can be increased and the allowable outward axial load must be decreased at a rate of 59 kg / 7 bar [130 lb / 100 psi] for shaft codes 02, 10, 12, 20, 21, 22 & 23. The rate for shaft codes 28 & 31 is 78 kg / 7 bar [175 lb / 100 psi].

### Permissible Shaft Seal Pressure

#### Motors with Shaft Diameters 1-1/4" or less

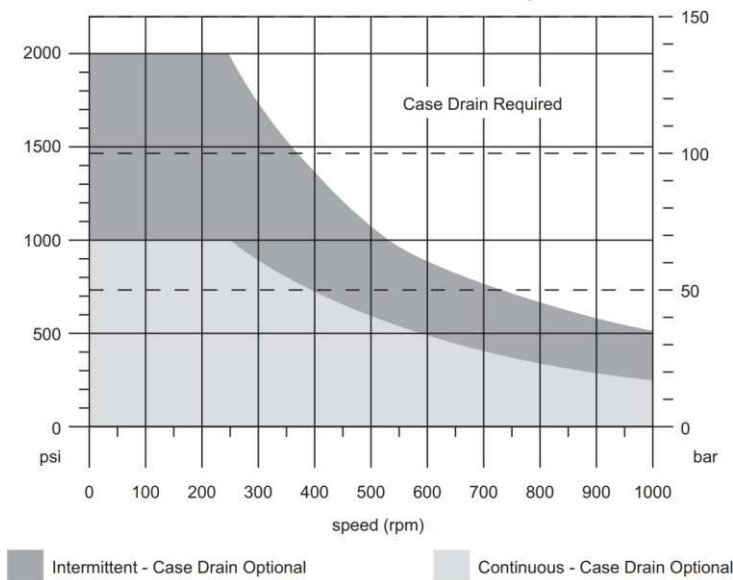


Figure 20 Permissible Shaft Seal Pressure for Motors with Shaft Diameters 1-1/4" or less

#### Motors with Shaft Diameters larger than 1-1/4"

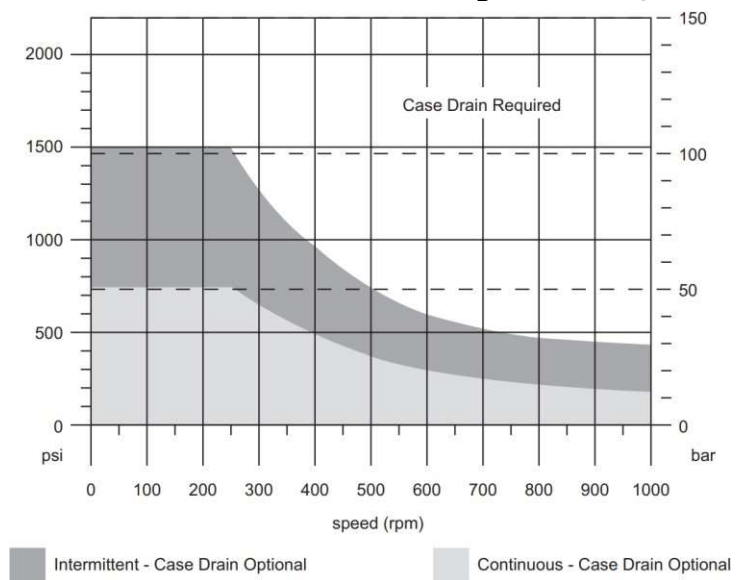


Figure 21 Permissible Shaft Seal Pressure for Motors with Shaft Diameters larger than 1-1/4"


WHITE can accept no responsibility for possible errors in catalogues, brochures, and other printed material. WHITE reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary in specifications already agreed.

All trademarks in this material are the property of the respective companies. WHITE and the WHITE logotype are trademarks of WHITE Drive Motors & Steering LLC and WHITE Drive Motors and Steering Sp. z o.o.

# Porting

## Side Ported – Offset


STANDARD

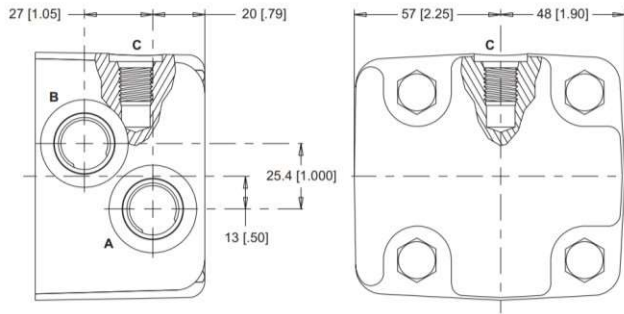

**1** Main Ports **A, B:** 7/8-14 UNF  
Drain Port **C:** 7/16-20 UNF

**2** Main Ports **A, B:** G 1/2  
Drain Port **C:** G 1/4


OPTIONAL



**D:** 10 Series/2-Way Valve Cavity 7/8-14 UNF

Figure 22 Side Ported – Offset


## Side Ported – 180° Opposed

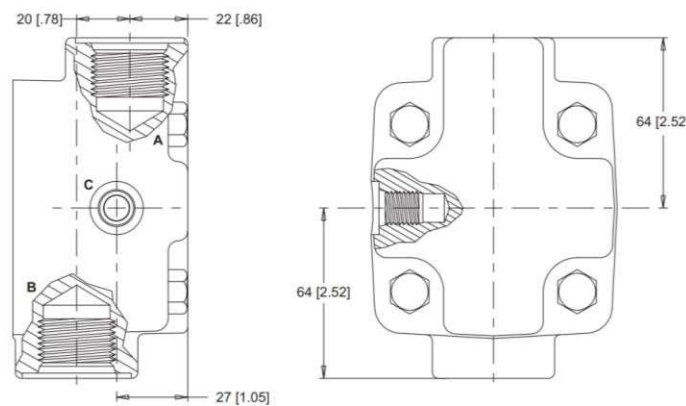

**6** Main Ports **A, B:** 1 1/16-12 UN  
Drain Port **C:** 7/16-20 UNF

Figure 23 Side Ported – 180° Opposed


## Side Ported – Offset Manifold

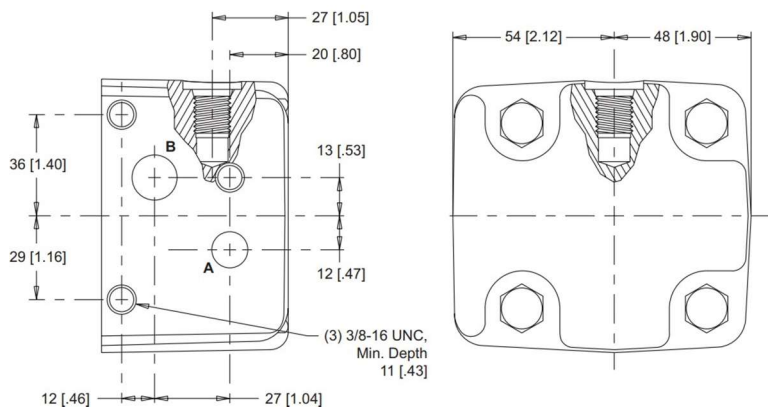

**B** Main Ports **A:** 12.7 [.500] Drilled **B:** 15.9 [.625] Drilled  
Drain Port **C:** 7/16-20 UNF

Figure 24 Side Ported – Offset Manifold

## End Ported - Aligned

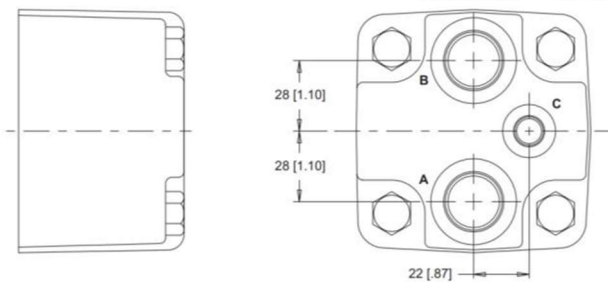

**1** Main Ports **A, B:** 7/8-14 UNF  
Drain Port **C:** 7/16-20 UNF

**2** Main Ports **A, B:** G 1/2  
Drain Port **C:** G 1/4

Figure 25 End Ported – Aligned

WHITE can accept no responsibility for possible errors in catalogues, brochures, and other printed material. WHITE reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary in specifications already agreed.


All trademarks in this material are the property of the respective companies. WHITE and the WHITE logotype are trademarks of WHITE Drive Motors & Steering LLC and WHITE Drive Motors and Steering Sp. z o.o..

All rights reserved.

# Shafts


**02** 1" 6B Spline

6B Spline  
SAE J499 Standard

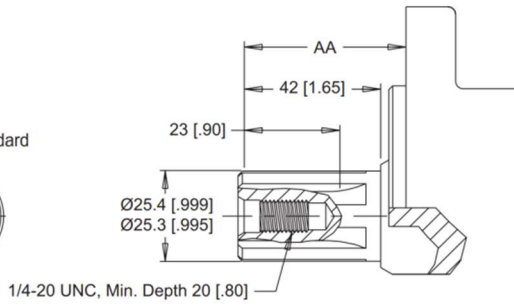


Max. Torque: 678 Nm [6000 lb-in]

**12** 25mm Straight

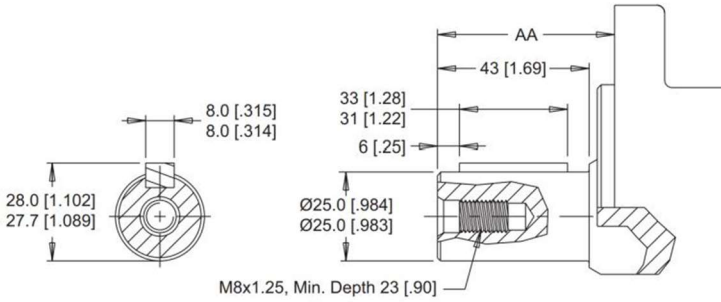

Max. Torque: 678 Nm [6000 lb-in]



**21** 32mm Straight

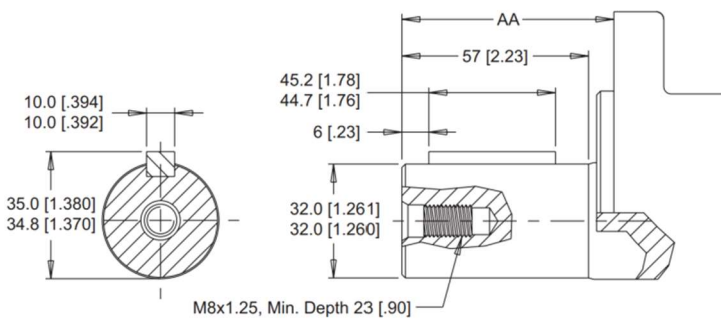

Max. Torque: 881 Nm [7800 lb-in]


**23** 14 Tooth Spline

12/24 Pitch Standard  
(ANSI B92.1-1996 Spline)

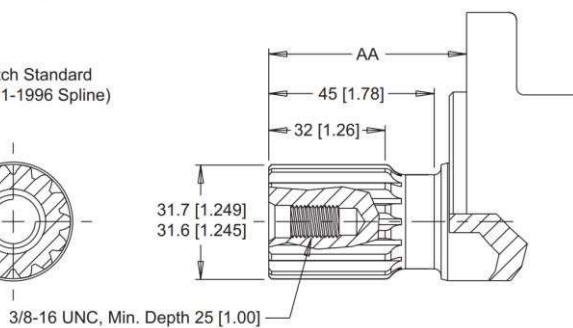


Max. Torque: 881 Nm [7800 lb-in]

**10** 1" Straight

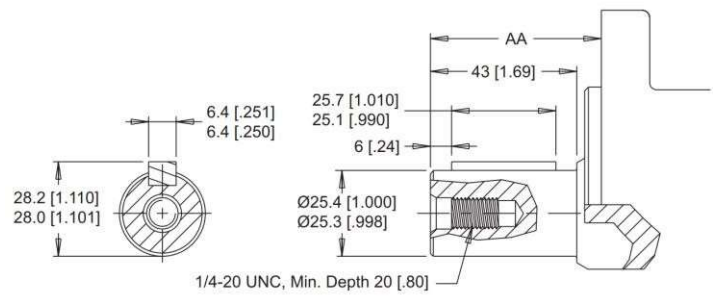


Max. Torque: 655 Nm [5800 lb-in]

**20** 1-1/4" Straight

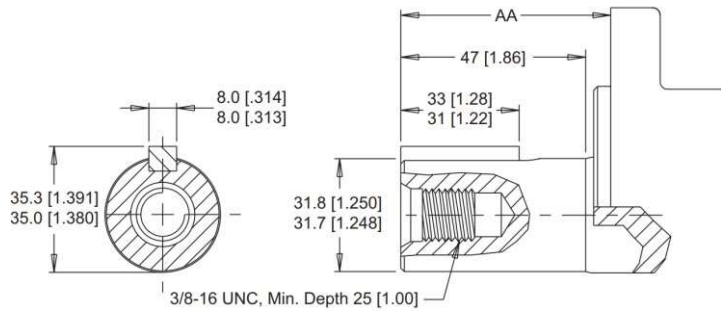


Max. Torque: 881 Nm [7800 lb-in]

**22** 1-1/4" Tapered

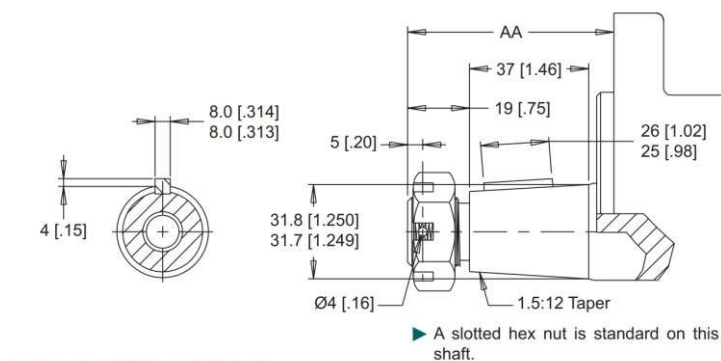

Max. Torque: 881 Nm [7800 lb-in]

**28** 35mm Tapered

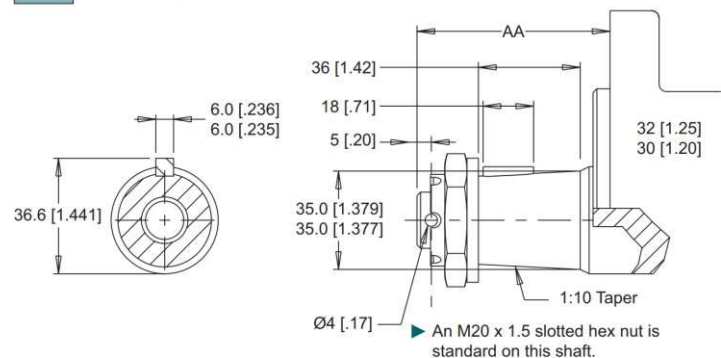


Max. Torque: 881 Nm [7800 lb-in]

WHITE can accept no responsibility for possible errors in catalogues, brochures, and other printed material. WHITE reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary in specifications already agreed.

All trademarks in this material are the property of the respective companies. WHITE and the WHITE logotype are trademarks of WHITE Drive Motors & Steering LLC and WHITE Drive Motors and Steering Sp. z o.o..

All rights reserved.

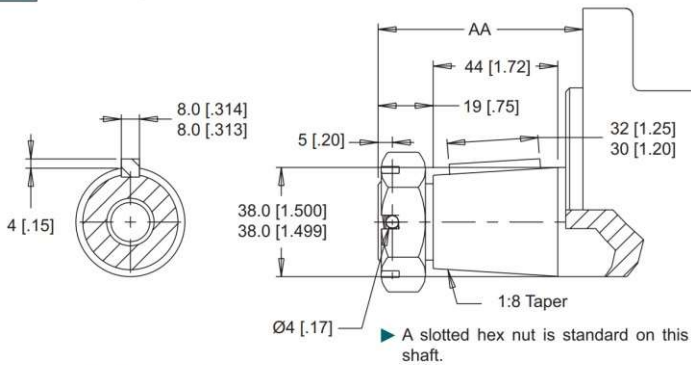**31** 1-1/2" Tapered


Max. Torque: 881 Nm [7800 lb-in]

 Shaft lengths vary  $\pm 0.8$  mm [.030 in.]

**Mounting / Shaft Length Chart**

 Dimension AA is the overall distance from the motor mounting surface to the end of the shaft and is referenced on detailed shaft drawings above as well as shafts on page *Shafts*.

AA	SAE A & B Mounts mm [in]	Magneto Mounts mm [in]	Wheel Mounts mm [in]
02	51 2.00	47 1.85	91 3.58
10	51 2.00	47 1.85	91 3.58
12	51 2.00	47 1.85	91 3.58
20	55 2.17	52 2.03	96 3.76
21	65 2.54	61 2.39	105 4.12
22	64 2.51	60 2.36	104 4.09
23	55 2.17	52 2.03	96 3.76
28	N/A	N/A	107 4.20
31	N/A	N/A	123 4.86

Table 6 AA dimension

## Housings

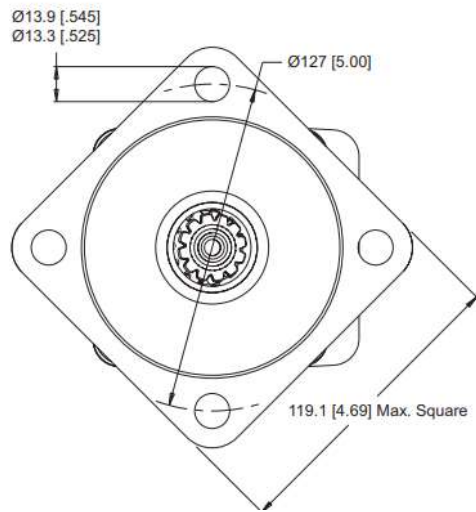
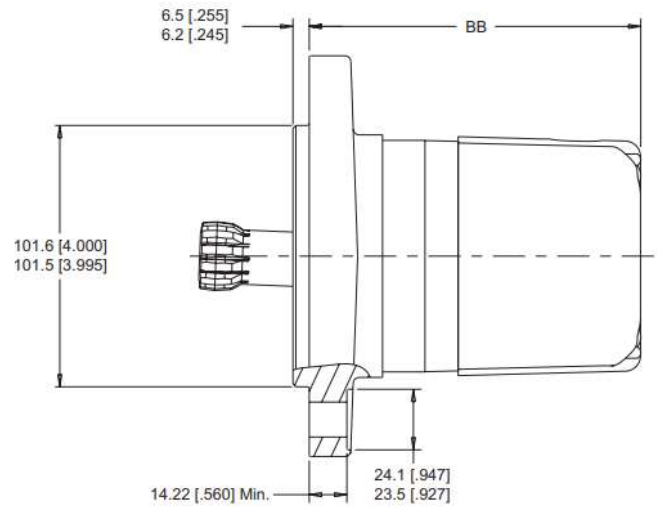
**4-HOLE, 4.00" PILOT MOUNT**


Figure 26 4-Hole, 4.00" Pilot Mount

**S2** End Ports    **S8** Side Ports


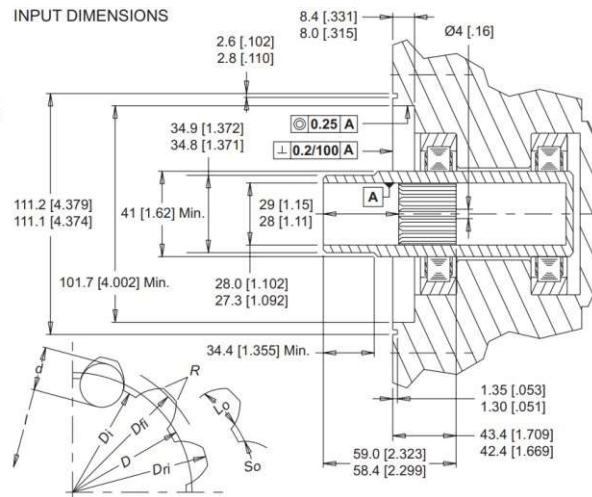



# Shafts

**0B** Cardan (For Use With S2 & S8 Mounts)

Fillet Root Side Fit	
Number of Teeth .....	12
Pitch .....	12/24
Pressure Angle .....	30°
Pitch Diameter $D$ .....	25.4 [1.000]
Base Diameter .....	21.997 [.8660]
Major Diameter $D_{ri}$ .....	27.74 [1.092] - 27.59 [1.086]
Form Diameter (Min.) $D_{fi}$ .....	26.93 [1.060]
Minor Diameter $D_i$ .....	23.224 [.9143] - 23.097 [.9093]
Space Width (Circular) $L_o^*$	
Max. Actual .....	4.318 [.1700]
Min. Effective .....	4.216 [.1660]
Fillet Radius $R$ .....	0.76 [.030] - 0.64 [.025]
Max. Distance Between Pins $l$ .....	19.190 [.7555] - 19.020 [.7488]
Pin Diameter $d$ .....	4.496 [.1770]
with 3.38 [.133] Flat for Root Clearance.	

► The recommended shaft material is SAE 8620 or similar case hardening steel such as 20 MoCr4 (900 N/mm<sup>2</sup>) hardened to 59 - 62 HRc to a depth of 0.762 - 1.016 [.030 - .040].  
\*Dimensions apply after heat treatment.



WHITE can accept no responsibility for possible errors in catalogues, brochures, and other printed material. WHITE reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary in specifications already agreed.

All trademarks in this material are the property of the respective companies. WHITE and the WHITE logotype are trademarks of WHITE Drive Motors & Steering LLC and WHITE Drive Motors and Steering Sp. z o.o..

## Length & Weight Chart

Dimension BB is the overall motor length from the rear of the motor to the mounting flange surface and is referenced on the detailed housing drawing above.

BB	Length mm [in]	Weight Mounts mm [in]
080	124 [4.88]	12.2 [26.8]
100	128 [5.04]	12.5 [27.5]
110	130 [5.14]	12.6 [27.8]
130	134 [5.27]	12.8 [28.2]
160	140 [5.52]	13.3 [29.2]
200	148 [5.82]	13.6 [29.9]
230	154 [6.06]	14.0 [30.8]
250	148 [5.82]	13.6 [29.9]
	172 [6.77]	15.0 [32.9]
320	172 [6.77]	15.0 [32.9]
	172 [6.77]	15.0 [32.9]
400	172 [6.77]	15.0 [32.9]
	172 [6.77]	15.0 [32.9]
500	187 [7.37]	15.8 [34.7]
	187 [7.37]	15.8 [34.7]


350 series short motor weights can vary  $\pm 1\text{kg}$  [2 lb] depending on model configurations such as housing, shaft, endcover, options etc.

Table 7 BB Dimension


## Ordering Information

1. CHOOSE SERIES DESIGNATION

**350** Clockwise Rotation



**351** Counterclockwise Rotation



► The 350 & 351 series are bi-directional. Reversing the inlet hose will reverse shaft rotation.

4. SELECT A SHAFT OPTION

<b>0B</b> Cardan	<b>21</b> 32mm Straight
<b>02</b> 6B Spline	<b>22</b> 1-1/4" Tapered
<b>10</b> 1" Straight	<b>23</b> 14 Tooth Spline
<b>12</b> 25mm Straight	<b>28</b> 35mm Tapered
<b>20</b> 1-1/4" Straight	<b>31</b> 1-1/2" Tapered

► The 28 and 31 shafts are only available on the AG, AH, Y2 and Y8 mounts.

2. SELECT A DISPLACEMENT OPTION

<b>080</b> 80 cm <sup>3</sup> /rev [4.9 in <sup>3</sup> /rev]	<b>230</b> 229 cm <sup>3</sup> /rev [14.0 in <sup>3</sup> /rev]
<b>100</b> 100 cm <sup>3</sup> /rev [6.1 in <sup>3</sup> /rev]	<b>250</b> 248 cm <sup>3</sup> /rev [15.1 in <sup>3</sup> /rev]
<b>110</b> 112 cm <sup>3</sup> /rev [6.8 in <sup>3</sup> /rev]	<b>320</b> 322 cm <sup>3</sup> /rev [19.6 in <sup>3</sup> /rev]
<b>130</b> 129 cm <sup>3</sup> /rev [7.9 in <sup>3</sup> /rev]	<b>400</b> 396 cm <sup>3</sup> /rev [24.2 in <sup>3</sup> /rev]
<b>160</b> 161 cm <sup>3</sup> /rev [9.8 in <sup>3</sup> /rev]	<b>500</b> 495 cm <sup>3</sup> /rev [30.2 in <sup>3</sup> /rev]
<b>200</b> 201 cm <sup>3</sup> /rev [12.3 in <sup>3</sup> /rev]	

5. SELECT A PAINT OPTION

<b>A</b> Black	<b>B</b> Black, Unpainted Mounting Surface
<b>B</b> Black, Unpainted Mounting Surface	<b>Z</b> No Paint

► The S2 and S8 mounts are only available with no paint.

3a. SELECT MOUNT TYPE

▼ END MOUNT

- A0** 2-Hole, SAE A Mount
- A2** 4-Hole, Magneto Mount
- AG** 4-Hole SAE A Mount
- B0** 2-Hole SAE B Mount
- S2** 4-Hole Short Motor Mount
- Y2** 4-Hole Wheel Mount

▼ SIDE MOUNT

- A7** 2-Hole, SAE A Mount
- A8** 4-Hole, Magneto Mount
- AH** 4-Hole SAE A Mount
- B7** 2-Hole SAE B Mount
- S8** 4-Hole Short Motor Mount
- Y8** 4-Hole Wheel Mount

3b. SELECT PORT SIZE

▼ END PORT OPTIONS

- 1** 7/8-14 UNF Aligned
- 2** G 1/2 Aligned

▼ SIDE PORT OPTIONS

- 1** 7/8-14 UNF, Offset
- 2** G 1/2, Offset
- 6** 1 1/16-20 UN, 180° Opposed
- B** Drilled Offset Manifold

6. SELECT A VALVE CAVITY / CARTRIDGE OPTION

<b>A</b> None	<b>F</b> 121 bar [1750 psi] Relief
<b>B</b> Valve Cavity Only	<b>G</b> 138 bar [2000 psi] Relief
<b>C</b> 69 bar [1000 psi] Relief	<b>J</b> 173 bar [2500 psi] Relief
<b>D</b> 86 bar [1250 psi] Relief	<b>L</b> 207 bar [3000 psi] Relief
<b>E</b> 104 bar [1500 psi] Relief	

► Valve cavity is only available on side ports 1 & 2.

7. SELECT AN ADD-ON OPTION

- A** Standard
- B** Lock Nut
- C** Solid Hex Nut

8. SELECT A MISCELLANEOUS OPTION

- AA** None
- AC** Freeturning Rotor
- MA** Mounting Rotated 90°
- MB** Freeturning Rotor With Mounting Rotated 90°

► Rotated mounting not available on the 4-Hole SAE A & wheel mounts

► The S2 and S8 Mounts are only available with the 0B cardan shaft.

WHITE can accept no responsibility for possible errors in catalogues, brochures, and other printed material. WHITE reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary in specifications already agreed.

All trademarks in this material are the property of the respective companies. WHITE and the WHITE logotype are trademarks of WHITE Drive Motors & Steering LLC and WHITE Drive Motors and Steering Sp. z o.o.

All rights reserved.

# Figures

Figure 1 Typical Motor/Brake Schematic .....	6
Figure 2 Series Circuit .....	7
Figure 3 Series Circuit .....	7
Figure 4 Allowable Bearing & Shaft Loading .....	9
Figure 5 Induced side load .....	12
Figure 6 Speed Sensor.....	14
Figure 7 Z Option .....	15
Figure 8 Y Option .....	15
Figure 9 X Option .....	15
Figure 10 W Option.....	15
Figure 11 Valve Cavity .....	17
Figure 12 Slinger seal .....	17
Figure 13 2-Hole, SAE A Mount.....	26
Figure 14 4-Hole, Magneto Mount .....	27
Figure 15 4-Hole, SAE A Mount.....	27
Figure 16 2-Hole, SAE B Mount .....	27
Figure 17 4-Hole, 4.25" Wheel Mount .....	28
Figure 18 SAE A, SAE B & Magneto Mounts Allowable Shaft Load/ Bearing Curve .....	29
Figure 19 4.25" Wheel Mount Allowable Shaft Load/ Bearing Curve .....	29
Figure 20 Permissible Shaft Seal Pressure for Motors with Shaft Diameters 1-1/4" or less.....	29
Figure 21 Permissible Shaft Seal Pressure for Motors with Shaft Diameters larger than 1-1/4" .....	29
Figure 22 Side Ported – Offset .....	30
Figure 23 Side Ported – 180° Opposed .....	30
Figure 24 Side Ported – Offset Manifold .....	30
Figure 25 End Ported – Aligned.....	30
Figure 26 4-Hole, 4.00" Pilot Mount .....	32

# Tables

Table 1 Bearing load multiplication factor table .....	9
Table 2 Rolling Resistance .....	10
Table 3 Coefficient of friction .....	11
Table 4 WS 350/351 Series specification.....	20
Table 5 Y,Z dimension .....	28
Table 6 AA dimension .....	32
Table 7 BB Dimension .....	33



White Drive Motors & Steering, LLC  
110 Bill Bryan Blvd, Hopkinsville, Kentucky, 42240

White Drive Motors and Steering sp. z o.o.  
ul. Logistyczna 1, Bielany Wrocławskie, 55-040 Kobierzyce

[whitedriveproducts.com](http://whitedriveproducts.com)